




I removed the shield plate under the truck, which was simple since it is attached with only three bolts. I attached the filtration system and put the shield back in place. The shield provides plenty of strength to support the filtration system and is easy to remove when changing filters. This location minimized the amount of hose necessary for the installation as well.

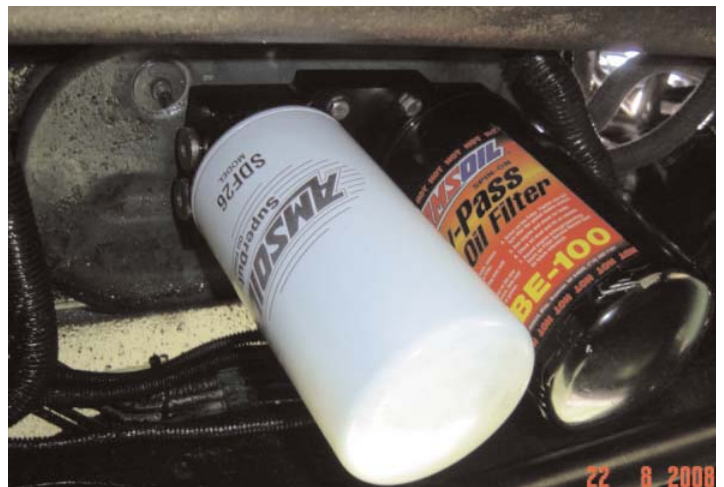

Disclaimer: These installation examples have been submitted by sources independent of AMSOIL INC. and may not comply with AMSOIL INC. installation instructions or application recommendations.