




The bracket for this truck is located in the same position as many others, in front of the battery on the passenger side. Positioning the unit here does not interfere with removing or changing the battery, and the filters can be changed by just removing the intake hose from the turbo to the air filter. The petcock valve is located directly in front for easy analysis.

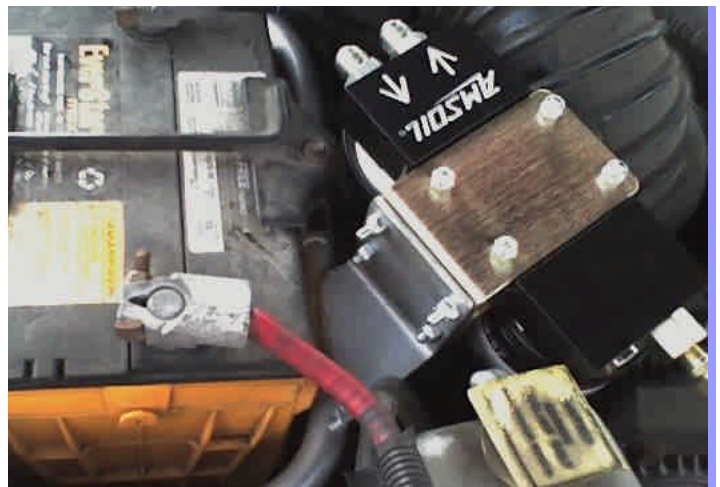

*Disclaimer: These installation examples have been submitted by sources independent of AMSOIL INC. and may not comply with AMSOIL INC. installation instructions or application recommendations.*