$1 U.S.

AMSOIL®

# Factory-Direct Catalog



**Free Shipping** on Orders of $100 or More. See page 3 for details.

**TO ORDER:** 1-800-777-7094 MONDAY – FRIDAY 7 A.M. – 7 P.M. CT | **AMSOIL**.com

# Product Index


| | |
|---|---|
| Motor Oil | **4** |
| European Motor Oil | **8** |
| Classic/Collector Car Motor Oil | **9** |
| Racing Oil | **10** |
| Diesel Oil | **11** |
| Oil Analysis | **13** |
| ATV/UTV Oil | **15** |
| Snowmobile Oil/Dirt Bike Oil/ Suspension Fluid | **16** |
| Motorcycle Oil | **17** |
| Scooter Oil | **19** |
| Briggs & Stratton Synthetic 4T Racing Oil | **20** |
| Marine Oil | **21** |
| 2-Stroke Oil | **23** |
| Chaincase & Gear Oil | **24** |
| Small-Engine Oil | **25** |
| Transmission Fluid | **26** |
| Gear Lube | **30** |
| Filters | **32** |
| Grease | **34** |
| Air Tool Oil/ Bar and Chain Oil | **36** |
| Compressor Oil/Fuel Additives | **37** |
| Cleaners and Protectants | **42** |
| Power Steering Fluid/Coolant Boost/Coolant | **45** |
| Car-Care Products | **47** |
| Brake Fluid/Brake and Parts Cleaner | **48** |
| Waterless Wash & Wax/ Aftermarket Partners | **49** |


*All trademarked names and images are the property of their respective owners and may be registered marks in some countries. No affiliation or endorsement claim, express or implied, is made by their use.



**WARRANTY SECURE®**

All AMSOIL lubricants and filters are covered by the AMSOIL Limited Warranty. For details visit AMSOIL.com/warranty.aspx.

# Power Big Savings with Preferred Customer Membership

## Preferred Customers Enjoy




**Reduced Pricing**

**Up to 25% off every order**




**Free Shipping**

**On orders over $100**




**$5 Back**

**Get a $5 coupon with every $100 you spend**




**Free Membership**

**When you spend $500 in a year**




**Birthday Gift**

**Celebrate your day with $5 off**



**Exclusive Promotions**

**Throughout the year**

Plus, you will receive the quarterly *AMSOIL Magazine* with the latest product details, technical information and more.

**Six-month trial membership just $10.**
**Full year of membership for just $20.**

Sign up at AMSOIL.com/pc today and use this referral number. ▼

**0**

**Referral #**_____

**TECHNICAL QUESTIONS**
(715) 399-8324 (TECH) or
tech@AMSOIL.com

**SHIPPING AND HANDLING**
**Contiguous U.S.** – Free shipping on orders of $100 or more in the contiguous U.S. Orders below that threshold pay a flat shipping rate of $9.99. Exclusions apply. See the shipping & handling policy at AMSOIL.com/storefront/shippinginformation.aspx.

**Alaska** – Add 7.5 percent to product prices for extra freight expenses. See Shipping Info at AMSOIL.com/storefront/shippinginformation.aspx.

**Hawaii** – Orders are shipped using the most cost-effective method and actual freight charges will be applied when orders are shipped. See Shipping Info at AMSOIL.com/storefront/shippinginformation.aspx for additional details.

**Military Post Boxes** – AMSOIL INC. ships orders to APO and FPO addresses for customers' personal use only. Orders are shipped using U.S. Mail Parcel Post and will be charged actual freight costs, which will be charged at the time the order is shipped. See Shipping Info at AMSOIL.com for additional details.

**PRODUCT DAMAGED DURING SHIPPING**
If there is visible damage to your order upon delivery, refuse the order. It will be returned to AMSOIL INC. for inspection and a new order will be sent at no extra charge to you. If you discover hidden damage after accepting delivery of your order, call 1-800-777-7094 for instructions.

**SALES TAX INFORMATION**
AMSOIL INC. is required to collect state, city, county and other taxes. AMSOIL also collects any additional taxes on lubricating products required by certain states.


*Prices subject to change without notice.*


# WHY BUY SIGNATURE SERIES?

## Signature Series Delivers Powerful Protection

AMSOIL delivers powerful protection. How good is it? An independent lab compared AMSOIL synthetic motor oil head-to-head against a leading competitor in a 100,000-mile test[P]. AMSOIL provided far superior wear protection and kept bearings looking like new.

*[P]Testing conducted in an independent lab using AMSOIL Signature Series 5W-30 Synthetic Motor Oil and a leading synthetic-blend 5W-30 motor oil in Ford F-150 trucks with 3.5L twin-turbo engines.*

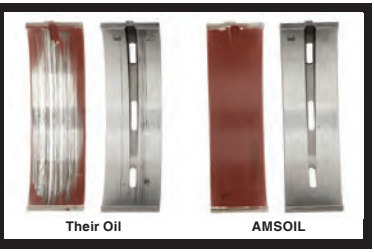

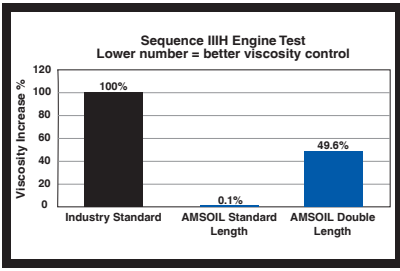
## AMSOIL Resists Viscosity Increase

AMSOIL is barely challenged by the industry-standard testing, demonstrating only a 0.1% viscosity increase. Even when the test length is doubled, AMSOIL **delivered twice the viscosity control** required by the standard.[GG]

*[GG]Based on independent testing of AMSOIL Signature Series 5W-30 in the Sequence IIIH Engine Test (ASTM D8111), required by the ILSAC GF-6 and API SP specifications.*



## AMSOIL Keeps Pistons Cleaner

Even after doubling the length of the industry-standard test, AMSOIL delivered **40% cleaner pistons** than required by the standard.[FF]

*[FF]Based on independent testing of AMSOIL Signature Series 5W-30 in the Sequence IIIH Engine Test (ASTM D8111), required by the ILSAC GF-6 and API SP specifications.*

## Signature Series Protects Against LSPI

AMSOIL Synthetic Motor Oils achieved **100% protection** against LSPI.[B]

*[B]Based on zero LSPI events in five consecutive tests of AMSOIL Signature Series, XL and OE 5W-30 Motor Oil in the LSPI engine test required by the GM dexos1 Gen 2 specification.*

## Signature Series Guards Turbos

Protects turbochargers **72% better** than required[C] by the GM dexos1® Gen 2 specification.

*[C]Based on independent testing of AMSOIL Signature Series 5W-30 in the GM turbo coking test.*

## Signature Series Cleans

AMSOIL Signature Series Synthetic Motor Oil has **50% more** detergents[D] to help keep oil passages clean and promote oil circulation. It provides **90% better protection** against sludge.[DD]

*[D]vs. AMSOIL OE Motor Oil [DD]Based on independent testing of AMSOIL Signature Series 5W-30 in the ASTM D6593 engine test for oil screen plugging as required by the API SN specification.*

**Signature Series Fights Wear**
**75% more engine protection** against horsepower loss and wear.[A]
*[A]Based on independent testing of AMSOIL Signature Series 0W-20 using the ASTM D6891 standard test.*

## SIGNATURE SERIES SYNTHETIC MOTOR OIL

Engineered for enthusiasts seeking maximum protection and performance. Precision-formulated with cutting-edge technology and a longstanding devotion to making the world's best motor oil. The result: engine protection that blows the doors off the highest industry standards. Guaranteed protection for up to 25,000 miles or 1 year, whichever comes first.




Package sizes:

QUART GALLON

## Extended-Life 100% Synthetic Motor Oil

Overbuilt for road warriors so you can confidently drive up to 20,000 miles or 1 year, whichever comes first, between oil changes. A proprietary combination of advanced synthetic base oils and a boosted additive package promotes cleanliness and prolonged engine life. AMSOIL Extended-Life protection delivers peace of mind and convenience. Provides **37% more cleaning power** to help keep your engine running smoother, longer.[UU]




"Put this in my light duty, full size pickup. Noticeable difference right away. Engine quieter and clean."

**– Jim P**
*Northern VA*

Package sizes:

QUART GALLON

## OE 100% Synthetic Motor Oil

Delivers 100% synthetic engine protection for advanced automotive technology, including turbos and direct injection. **Provides 47% more wear protection**.[G] Specifically formulated for the longer drain intervals recommended by original equipment (OE) manufacturers.




Package sizes:

QUART GALLON

[UU]Compared to AMSOIL OE Synthetic Motor Oil.
[G]Based on independent testing of OE 0W-20 in the Peugeot TU3M Wear Test as required by the dexos1 Gen 2 specification.

## 100% Synthetic Hybrid Motor Oil




Custom formulation designed to combat the unique challenges posed by hybrid electric vehicles (HEV) and plug-in hybrid electric vehicles (PHEV), like frequent starts and stops and fuel dilution. It flows quickly to reach critical components when the engine engages. AMSOIL Hybrid Motor Oil features a robust viscosity that protects against the harmful effects of fuel dilution. Protects for up to 15,000 miles or 1 year, whichever comes first.[1]

QUART

[1]AMSOIL 0W-8 Hybrid Motor Oil is recommended for OEM-recommended drain intervals.

## 100% Synthetic High-Mileage Motor Oil

Designed specifically for the unique demands of high-mileage engines, helping extend the life of vehicles. It features a unique formulation that delivers extra detergency and a robust viscosity to clean and protect high-mileage engines with 75,000+ miles. It delivers purpose-built protection at a time in a vehicle's life where it could benefit from more-robust maintenance. AMSOIL High-Mileage Motor Oil cleans and protects engines with boosted detergency and an additive package that fights oil breakdown and oil leaks. Protects for up to 12,000 miles or 1 year, whichever comes first.




Package sizes:

QUART GALLON

## Synthetic European Motor Oil

Features precisely balanced formulations that consider the needs of modern exhaust treatment devices. It is important to use an oil that meets the proper specification to ensure optimum engine protection and performance.




EZT




AFE

### 0W-20 LS-VW Synthetic European Motor Oil[31] • EZT

*API SN PLUS, SN... • ACEA C5 • VW 508.00/509.00, TL52577 • Porsche C20*

### 0W-20 LS Synthetic European Motor Oil • AFE

*API SN PLUS (Resource Conserving), SN, SM... • ILSAC GF-5 • ACEA C5, A1/B1 • BMW LL-17FE+ • MB 229.71 • Ford WSS-M2C947-B1 • Opel/Vauxhall OV0401547 • Fiat 9.55535-GSX • Chrysler MS-12145 • Volvo VCC RBS0-2AE*




EOT




AEL

### 0W-30 MS Synthetic European Motor Oil • EOT

*Use in vehicles that require API SP, SN Plus, SN • ACEA C2/C3 • BMW LL-01FE • MB 229.31, 229.51, 229.52 • VW/Audi 504.00/507.00 • Porsche C30*

### 5W-30 LS Synthetic European Motor Oil • AEL

*Use in vehicles that require API SN, SM... • ACEA C3 • GM dexos2 • Chrysler MS-11106 • MB 229.51 • BMW LL-04 • Porsche C30 • VW 504.00/507.00*




EFO




AFL

### 0W-40 FS Synthetic European Motor Oil[13] • EFO

*Use in vehicles that require ACEA A3/B3, A3/B4 • API SN, SM... • BMW LL-01 • MB 229.1, 229.3, 229.5 • Porsche A40 • Renault 0710, 0700 • VW/Audi 502.00/505.00*

### 5W-40 MS Synthetic European Motor Oil • AFL

*Use in vehicles that require ACEA C3 • API SN, SM, CF... • BMW Longlife-04 • Chrysler MS-10850 (supersedes MS-10896) • Ford WSS-M2C917-A • GM dexos2 (supersedes LL-A-025 and LL-B-025) • Renault 0710, 0700 • VW/Audi 502.00/505.01 • MB-Approval 229.51 • Porsche A40*




EFM




ETS

### 5W-40 FS Synthetic European Motor Oil[13] • EFM

*Use in vehicles that require ACEA A3/B3, A3/B4 • API SN, SM... • BMW LL-01 • Renault 0710, 0700 • MB-Approval 229.5 • Porsche A40 • GM LL-B-025 • VW/Audi 502.00/505.00*

### 10W-60 FS Synthetic European Motor Oil[13] • ETS

*Use in vehicles that require API SN • ACEA A3/B3, A3/B4*

Package sizes:




[31,13]See page 50 for Proposition 65 information for this product.

# BUILD IT.




# CRUISE IT.




## Assembly Lube (EAL)[17]

Formulated to cling to engine parts and provide exceptional wear protection in newly built or rebuilt high-performance, racing and other four-stroke engines.

## Break-In Oil (BRK)[17]

Allows for quick and efficient piston ring seating in new and rebuilt high-performance and racing engines.

[17] See page 50 for Proposition 65 information for this product.

## Z-ROD® Synthetic Motor Oil

High-zinc, high-phosphorus formulation engineered specifically for classic cars and performance vehicles.

OFFICIAL OIL OFFICIAL · Jeep Beach · Goodguys Rod & Custom Association · Jeep Jamboree USA

## AMSOIL Delivers Superior Rust Protection




In industry-standard testing, AMSOIL Z-ROD® completely prevented rust formation while a leading competitor did not.[JJ]

*[JJ] Based upon in-house testing of AMSOIL Z-ROD 10W-40 and a leading competitor obtained on 7/25/2019 in ASTM D1748-10.*

# RACE IT.

**PRODUCTS THE PROS USE**




Package sizes: QUART, 1 GALLON

## DOMINATOR® Synthetic Racing Oil[17]

Superior performance and maximum protection in high-performance and racing applications.

[17, 13]See page 50 for Proposition 65 information for this product.



*"AMSOIL products are the best on the market and definitely give us an added performance factor."*

**Bryce Menzies**
Professional Off-Road Driver

## 20W-50 Synthetic Competition Diesel Oil[13] • DCO

Delivers 50% more film thickness[Q] to withstand high cylinder pressures and protect against wear.

DCO




Package sizes: QUART, 1 GALLON

[Q]Compared to the 3.5 cP HTHS limit for SAE 15W-40.

OFFICIAL OIL OFFICIAL

FREEDOM FACTORY

LPE LINGENFELTER PERFORMANCE ENGINEERING

AMSOIL SPRINT CAR NATIONAL CHAMPIONSHIP

TEAM O'NEIL RALLY SCHOOL

King of the Hammers the ultimate desert race powered by OPTIMA BATTERIES

NRRA NATIONAL ROCK RACING ASSOCIATION

AMSOIL CHAMPIONSHIP OFF-ROAD BRUNT

## Signature Series Max-Duty Synthetic Diesel Oil[13]

*Use in vehicles that require API CK-4, CJ-4 or CI-4+*

Engineered for maximum protection and performance for diesel engines. **Provides 6X more engine protection.[I]** Delivers up to 60% better turbo cleanliness[J] and withstands the extra demands you place on the turbo when pulling heavy loads or updating the tune for maximum horsepower. Provides up to 76% less oil consumption than required by the API CK-4 standard in the Caterpillar-1N oil consumption test. Provides up to 2X better rust protection.[K]










DELIVERS 4X BETTER COLD-TEMPERATURE PERFORMANCE[EE]








Package sizes:

QUART | 1 GALLON | 2.5 GALLONS

[I]Based on specification standards of CAT C13 2nd Ring Top Land Carbon testing. [K]Based on industry standard testing using the NMMA FC-W Rust Test. [J]than required by the Detroit Diesel DD13 Scuffing Test for Specification DFS 93K222 using 5W-30 as worst-case representation. [EE]When compared to SAE 15W-40 in ASTM D5293 Cold Cranking Viscosity Test.

[13] See page 50 for Proposition 65 information for this product.

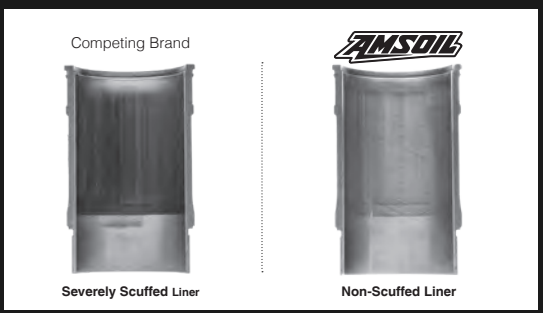


## AMSOIL Fights Wear

AMSOIL delivers **powerful engine protection**. How good is it? In third-party testing compared to a leading brand, AMSOIL provided long-lasting wear protection, **keeping cylinder liners looking like new.**[DD]

*[DD]Based on third-party testing of AMSOIL 5W-30 Signature Series Max-Duty Synthetic Diesel Oil and a leading conventional 15W-40 diesel oil using the Detroit Diesel® DD13 Scuffing test for specification DFS 93K222.* *All trademarked names and images are the property of their respective owners and may be registered marks in some countries. No affiliation or endorsement claim, express or implied, is made by their use.*

## Heavy-Duty Synthetic Diesel Oil[13]

*Use in vehicles that require API CK-4, CJ-4 or CI-4+*

Outstanding protection and performance for customers seeking an upgrade over conventional and other synthetic diesel oils. **Provides 4X more engine protection.[1]** Provides up to 66% less oil consumption than required by the API CK-4 standard in the Caterpillar-1N oil consumption test.

ADN




ADO




ADP




Package sizes:




[1]than required by the Detroit Diesel DD13 Scuffing Test for Specification DFS 93K222 using 10W-30 as worst-case representation.

[13] See page 50 for Proposition 65 information for this product.

FD1030 FD540 FD1540




## AMSOIL/Fleece Freedom Series Synthetic Diesel Oil

NEW

Treat your diesel right with AMSOIL/Fleece Freedom Series Synthetic Diesel Oil. Freedom Series emerged when AMSOIL and Fleece Performance Engineering partnered to develop an advanced formulation for diesel pickup trucks equipped with Fleece products. Freedom Series Synthetic Diesel Oil provides excellent turbo cleanliness, superior soot control and outstanding wear protection. The result: protection engineered to perform.

QUART

FD1550




## AMSOIL/Fleece Freedom Series 15W-50 Synthetic Racing Oil (FD1550)

NEW

Specifically engineered to deliver the most important benefits for high-horsepower and turbocharged competition diesel engines, including superior bearing protection and robust durability that withstands extreme pressures and temperatures.

QUART

FDBRK




## AMSOIL/Fleece Freedom Series SAE 30 Break-In Oil (FDBRK)

NEW

The preferred break-in oil of Fleece Performance Engineering and Freedom Racing Engines. Designed to deliver maximum compression, horsepower and torque by providing quick and efficient piston ring seating in new and rebuilt high-performance and racing engines.

QUART

## Oil Analysis

AMSOIL offers oil analysis service options from Oil Analyzers Inc. By analyzing used engine oil, a qualified lab can detect mechanical problems your equipment may have developed. For more information, visit www.oaitesting.com.

Sample Kit (includes two-way postage) (KIT01)
Sample Kit (includes UPS shipping) (KIT02)
Sample Kit (KIT06)
Value Sample Kit (KIT14)
All-In-One Sample Kit (KIT18)
Oil Suction Pump w/10-ft. hose (G1206)
Replacement Hose 25-ft. (G1571)

Oil Analyzers INC.




## 100% Synthetic Diesel Oil

Engineered specifically for smaller American diesel pickups, vans, cars and SUVs, providing outstanding protection, performance and fuel economy. Delivers up to 6X better wear protection than required by a leading industry standard.[1]

**0W-20** • DP020

*Use in vehicles that require GM dexosD*

**5W-30** • DP530

*Use in vehicles that require GM dexosD, dexos2 • Chrysler MS-11106 • Ford WSS-M2C214-B1 • ACEA C3*

QUART




## Premium Protection Synthetic Motor Oil[13]

Ideal for older gasoline engines and pre-2007 diesel applications not equipped with diesel particulate filters (DPFs), where the extra protection of a high-zinc formula is desired.

Package sizes: QUART, 1 GALLON, 2.5 GALLONS




## 15W-40 Synthetic Heavy Duty Diesel and Marine Oil (AME)[13]

Engineered for pre-2007 on- and off-road diesel applications not equipped with diesel particulate filters (DPFs).

*Use in vehicles that require API CI-4+*

Package sizes: QUART, 1 GALLON, 2.5 GALLONS

[1]Based on third-party testing in the OM646LA cam wear test using 0W-20 as worst-case representation.

[13]See page 50 for Proposition 65 information for this product

**Like Heavy Duty Diesel and Marine Oil?**

Try Signature Series Max-Duty 15W-40 for a serious upgrade. See page 11.

## SYNTHETIC ATV/UTV MOTOR OIL

Formulated to provide upgraded performance and protection for hard-working and performance ATVs and UTVs.




Package sizes:

QUART QUART




### Synthetic ATV/UTV Transmission & Differential Fluid (AUDT)[18]

Protects heavily loaded, high-torque ATV and UTV gears and bearings against wear in the most severe operating conditions. Convenient easy-pack helps access tough-to-reach fill holes, making the job faster and cleaner.




### Synthetic ATV/UTV Dual-Clutch Transmission Fluid (AUDCT)

Provides superior anti-wear protection in the Can-Am Maverick* R dual-clutch transmission under heavily loaded, high-temperature operation.




### Synthetic ATV/UTV Continuously Variable Transmission Fluid (AUCVT)

Engineered to maximize CVT performance and efficiency while protecting against wear during heavily loaded, high-temperature operation, so you can confidently and safely push your machine to its limit.




### ATV/UTV Oil Change Kits (PK1/PK2/PK3/PK4/CK4/CK5/CK6)

Contains everything needed to perform an oil change on most Polaris* (PK) and Can-Am* (CK) UTVs and ATVs. Call (715) 399-8324 (TECH) (Monday-Friday, 8 a.m. - 5 p.m. Central Time) or contact the AMSOIL Dealer listed on the back of your catalog (if one is listed) to determine the appropriate kit for your application.

[13, 18]See page 50 for Proposition 65 information for this product.

AUPT



## Synthetic ATV/UTV Powertrain Fluid (AUPT)[13]

Purpose-built for transmission/differentials and front drives in Polaris* ATVs and UTVs, offering the perfect combination of protection and convenience.

EASY-PACK QUART

AFF



## Formula 4-Stroke® Powersports Synthetic Motor Oil (AFF)

Specially formulated for four-stroke recreational motors, including ATVs and snowmobiles.

QUART

OFFICIAL OIL OFFICIAL

PROGRESSIVE GNCC RACING

MONSTER ENERGY AMATEUR NATIONAL MOTOCROSS CHAMPIONSHIP AT LOUDON LYNN'S

AMSOIL SWAP MOTO RACE SERIES

## SYNTHETIC DIRT BIKE OIL


Delivers confidence in clutch feel, maximum horsepower and superior wear protection in all types of four-stroke dirt bikes.

QUART

**Synthetic Dirt Bike Transmission Fluid** • DBTF

### AMSOIL delivers confident clutch feel.

AMSOIL provides excellent clutch protection[7]. How good is it? In extreme simulated-start testing, AMSOIL provided superior wear protection and kept clutch plates looking new.

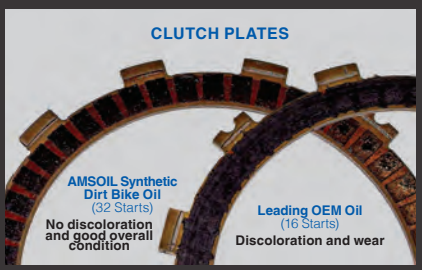





[7]Based on dyno testing of a Honda CRF450 dirt bike using AMSOIL 10W-40 Synthetic Dirt Bike Oil and a leading original equipment manufacturer 10W-40 conventional dirt bike oil.

## SHOCK THERAPY® SUSPENSION FLUID

Controls friction, heat, wear, foaming and scuffing in suspension components.

**Lightweight #5[13]** • STL

*Use in applications that demand quick rebounds under extreme temperatures.*

**Medium #10[13]** • STM

*Use in applications that require more dampening and slower rebounds.*

QUART




[13]See page 50 for Proposition 65 information for this product.

MVI




MCV




MCS




MSV




# SYNTHETIC V-TWIN MOTORCYCLE OIL

**20W-40** • MVI
Superior synthetic formulation provides long service life and maximum protection against engine wear in Indian* and Victory* motorcycles.

QUART

**20W-50** • MCV
Superior synthetic formulation provides long service life and maximum protection against engine wear in Harley-Davidson,* Buell* and other motorcycle engines, primaries and transmissions.

Package sizes:

QUART GALLON

**SAE 60** • MCS
Superior synthetic formulation provides long service life and maximum protection against engine wear in big-bore, air-cooled motorcycle engines, including Harley-Davidson Panhead, Shovelhead and Knucklehead.

QUART

**15W-60** • MSV
Superior synthetic formulation provides long service life and maximum protection against engine wear in Indian and Victory motorcycles.


QUART

OFFICIAL OIL OFFICIAL

BIKE WEEK 2026 Daytona Beach FLORIDA

LACONIA MOTORCYCLE WEEK 103 YEARS JUNE 2026 NEW HAMPSHIRE

STURGIS MOTORCYCLE RALLY 2026 86

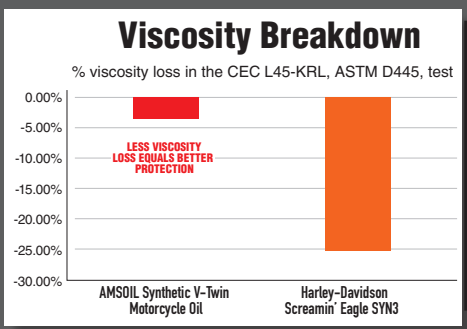


## AMSOIL Resists Viscosity Breakdown

AMSOIL resists viscosity breakdown **6X better** than Harley-Davidson* SYN3* for **improved protection** against compensator and transmission gear wear.[BB]

*[BB]Based on testing of AMSOIL 20W-50 Synthetic V-Twin Motorcycle Oil purchased on 3/19/19 and Harley-Davidson Screamin' Eagle SYN3 purchased on 3/19/19 in the CEC L45-KRL, ASTM D445 test.*
*All trademarked names and images are the property of their respective owners and may be registered marks in some countries. No affiliation or endorsement claim, express or implied, is made by their use.*

MVT




**Synthetic V-Twin Transmission Fluid (MVT)**
Helps quiet V-twin transmission noise and enable smooth shifts.

**Synthetic V-Twin Primary Fluid (MVP)**
Delivers consistent clutch feel and helps riders easily find neutral.

MVP




QUART

QUART




**V-Twin Oil Change Kits**
**(HDCK/HDBK/HDMC/HDMB)**
Contains everything needed to perform an oil change on most Harley-Davidson* motorcycles, including 20W-50 Synthetic V-Twin Motorcycle Oil, AMSOIL Motorcycle Oil Filter and O-ring.

**FITMENT INFO:**
**HDCK, HDBK:** most 1999-2016 Harley-Davidson motorcycles (HDCK includes chrome filter; HDBK includes black filter)

**HDMC, HDMB:** most 2017-present Harley-Davidson motorcycles (HDMC includes chrome filter; HDMB includes black filter)



## SYNTHETIC METRIC MOTORCYCLE OIL

MCT

MMF




**10W-30** • MCT

Superior synthetic formulation provides long service life, smooth shifts and maximum protection against engine wear in Honda,* Yamaha,* Suzuki* and Kawasaki* motorcycles.

**5W-40** • MMF

Superior synthetic formulation provides long service life, smooth shifts and maximum protection against engine wear in BMW* R 1250 GS* and R 1300 GS,* Aprilia,* Benelli,* Can-Am,* Husqvarna,* Moto Guzzi* and other motorcycles specifying a 5W-40 viscosity.

MCF

MFF




**10W-40** • MCF

Superior synthetic formulation provides long service life, smooth shifts and maximum protection against engine wear in Can-Am, Honda, Yamaha, Kawasaki, Triumph,* Suzuki, BMW and other motorcycle engines.

**15W-50** • MFF

Superior synthetic formulation provides long service life, smooth shifts and maximum protection against engine wear in Ducati,* BMW, KTM,* Yamaha, Triumph and Royal Enfield* motorcycles.

Package sizes:

QUART GALLON

ASO




**Formula 4-Stroke® Synthetic Scooter Oil (ASO)[13]**

Formulated specifically to meet the special needs of today's high-tech air- and water-cooled four-stroke motorized scooters.


QUART

[13]See page 50 for Proposition 65 information for this product.

BRIGGS & STRATTON

Briggs & Stratton, the world's largest small-engine manufacturer, chose AMSOIL to formulate the motor oil it recommends to protect its most demanding racing engines. Imagine what AMSOIL can do for you.

# ACCEPT NO SUBSTITUTES.

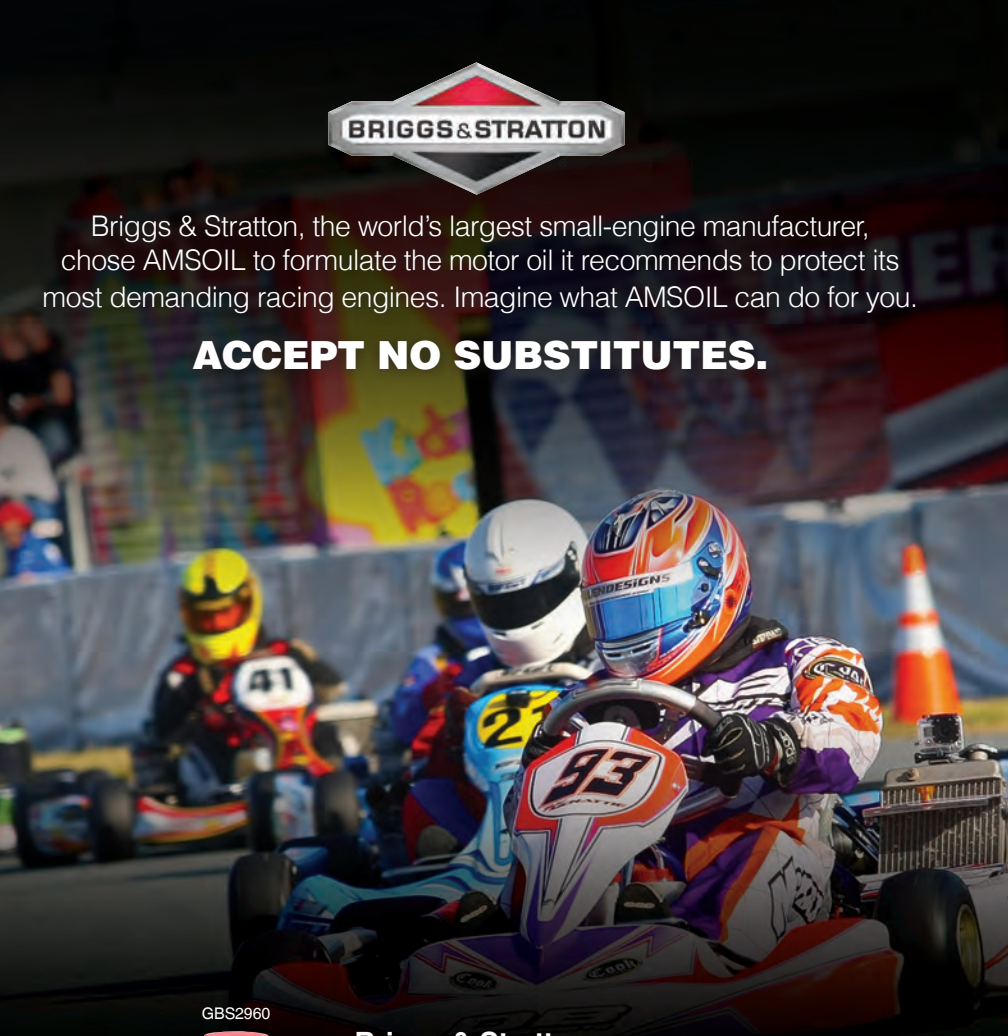

GBS2960




**Briggs & Stratton Synthetic 4T Racing Oil (GBS2960)[17]**

Formulated by AMSOIL specifically for stock and modified small-displacement air-cooled racing engines and recommended for any four-stroke air-cooled competition engine.

QUART

[17]See page 50 for Proposition 65 information for this product.

## Synthetic Marine Engine Oil

Formulated specifically for use in four-stroke gasoline-fueled engines used in marine applications. Certified to meet NMMA FC-W Catalyst Compatible performance specifications.

**10W-30**[13] • WCT

**10W-40**[13] • WCF

**25W-40 (Synthetic Blend)**[23] • WCM

Package sizes:

QUART GALLON

WCT WCF




• Outboard • Inboard • InboardOutboard (I/O) • Watercraft

WCM




Pete Maina
*Pro Fisherman*

HPM




## HP Marine™ Synthetic 2-Stroke Oil (HPM)[13]

LOW TOXICITY TESTED

Prevents piston skirt scuffing, cylinder bore scuffing and ring sticking in all two-stroke outboard motors, personal watercraft and anywhere NMMA TC-W3 and API-TC oils are specified.

Package sizes:

QUART GALLON

RUNS ON FREEDOM® AMSOIL

**RUNS ON FREEDOM**

Don't let powersports manufacturers bully you into buying their brand of oil. You have the freedom to choose your brand of oil and keep your warranty intact. Find out more at **AMSOIL**.com/freedom.

[23, 13]See page 50 for Proposition 65 information for this product.

ATO




Package sizes:

8.0 OUNCE BOTTLE

QUART

## Outboard 100:1 Pre-Mix Synthetic 2-Stroke Oil (ATO)[13]

Contains a heavy dose of low-temperature dispersant additives that excel at reducing varnish and carbon deposit formation in water-cooled outboard motors.

## Universal Synthetic Marine Gear Lube (AGM)[18]

Resists foam and retains extreme-pressure qualities in outboard lower units, stern drives, V-drives, bow and tunnel thrusters and marine transmissions. Delivers advanced outboard protection against power loss and gear wear, even with up to 15 percent water contamination.[V] Choose the easy-pack for fast, easy installation.

AGM




**OUTSTANDING PROTECTION** FOR LOWER UNITS

Package sizes:

10.0 OUNCE TUBE

EASY-PACK QUART

QUART

OFFICIAL OIL OFFICIAL

Waters & Woods
John Gillespie's




## Marine Gear Lube Pump (G3456)[27]

Specifically designed to ease installation and reduce mess when servicing lower units.

[13, 18, 27] See page 50 for Proposition 65 information for this product.

[V] Based upon AMSOIL testing of AMSOIL Synthetic Marine Gear Lube 75W-90 in ASTM 3233 and ASTM D892.

**Runs On Freedom™**
**Limited Snowmobile Warranty**
Use AMSOIL INTERCEPTOR® Synthetic 2-Stroke Oil exclusively in your current-model-year or newer sled and we'll cover engine repairs in the unlikely event of any engine breakdown for up to two years/5,000 miles.*

*To get details and register, visit AMSOIL.com/rofwarranty.

AIO




## Synthetic 2-Stroke Injector Oil (AIO)[13]

High-quality, cost-effective oil for the severe operating conditions of two-stroke snowmobiles and outboard motors.

Package sizes:

QUART GALLON

AIT




MAXIMUM RELIABILITY

## INTERCEPTOR® Synthetic 2-Stroke Oil (AIT)[13]

Prevents piston skirt scuffing, ring sticking and exhaust power valve sticking in two-stroke snowmobiles.

Package sizes:

QUART GALLON

**Meets the performance requirements of Polaris*, Arctic Cat* and Ski-Doo* two-stroke snowmobiles.**

[13] See page 50 for Proposition 65 information for this product.

## AMSOIL Fights Wear

AMSOIL INTERCEPTOR® Synthetic 2-Stroke Oil delivered **outstanding wear protection and cleanliness** in a rental sled throughout 1,617 miles of abuse.[CC]

**AMSOIL kept pistons virtually free of carbon with nearly all coating intact.**



**AMSOIL fought the formation of carbon deposits, allowing power valves to move freely.**



[CC]*Based upon use of a new 2019 Polaris® RMK® 850 as a rental sled at Grizzly Lodge December 2018 - February 2019.* *All trademarked names and images are the property of their respective owners and may be registered marks in some countries. No affiliation or endorsement claim, express or implied, is made by their use.



**Anson Scheele**
Team AMSOIL
Scheuring Speed Sports

TDR




**MAXIMUM**
PERFORMANCE

## DOMINATOR® Synthetic 2-Stroke Racing Oil (TDR)[13]

Delivers outstanding wear protection in high-horsepower and modified racing or trail motors, including snowmobiles, motorcycles, ATVs, personal watercraft, go-carts and outboard motors.

OFFICIAL OIL OFFICIAL

AMSOIL CHAMPIONSHIP SNOCROSS BRUNT

Package sizes:

QUART · GALLON

TCC




## Synthetic Chaincase & Gear Oil (TCC)

Superior protection for enclosed chains and gears found in snowmobiles, ATVs, UTVs and general equipment.

16.0 OUNCE BOTTLE

ATP




## SABER® Professional Synthetic 2-Stroke Oil (ATP)[13]

Provides superior protection for handheld two-stroke equipment at any mix ratio up to 100:1, offering the ultimate in convenience.

Package sizes:

1.5 OUNCE PILLOW PACK · 2.6 OUNCE BOTTLE · 3.5 OUNCE BOTTLE · 6.4 OUNCE BOTTLE · 8.0 OUNCE BOTTLE · 12.8 OUNCE BOTTLE · QUART · GALLON

SABER® Ratio™
100:1…1.3 oz. ……1 GAL

[13]See page 50 for Proposition 65 information for this product.

### SABER Professional Fights Carbon

Equipment using SABER Professional was **96% carbon-free**[N].



**AMSOIL SABER Professional**
300 Hours
**3.8% Screen Blockage**

VS.



**Leading Oil Brand**
45 Hours
**98% Screen Blockage**

*[N]Based on spark-arrestor testing.*

AES




ASE




ASF




SEF




## Synthetic Small-Engine Oil

Helps preserve engine power, reduce oil consumption and reduce maintenance in small engines used in severe service.

**Riding and Push Lawnmowers • Snowblowers • Generators • Pumps • Welders • Skid-Steers • Compressors • and more**

Package sizes:

QUART GALLON




AHF




## 20W-50 Zero-Turn Synthetic Hydrostatic Transmission Fluid (AHF)[13]

Fights wear to deliver smooth control and responsive power in zero-turn hydrostatic mowers.

Package sizes:

QUART GALLON

[13]See page 50 for Proposition 65 information for this product.

## Signature Series Synthetic Automatic Transmission Fluid

Resists wear and provides smooth shifts in passenger-car/light-truck transmissions. Provides reserve protection in fleet vehicles, work trucks and other severe-service applications that quickly break down other lubricants.










## Handle More Heat With Confidence

| Standard Severe Service | AMSOIL Severe Service |
|---|---|
| | RESERVE PROTECTION |

**Change Interval – Miles**

**Ultra-Low-Viscosity** • ULV

**Multi-Vehicle**[37] • ATF

**Fuel-Efficient**[37] • ATL

Engineered to exceed the requirements of original equipment manufacturers (OEMs) specifying low-viscosity oil.

Package sizes:




[37]See page 50 for Proposition 65 information for this product.

OTL




OTF




## OE Synthetic Automatic Transmission Fluid

Resists wear and provides smooth shifts in passenger-car/light-truck transmissions.

**Fuel-Efficient**[13] • OTL

Engineered to exceed the requirements of original equipment manufacturers (OEMs) specifying low-viscosity oil.

**Multi-Vehicle**[13] • OTF

Package sizes:




CVT




## Synthetic CVT Fluid (CVT)[13]

Provides outstanding protection and performance for continuously variable transmissions (CVT) throughout original equipment manufacturer (OEM)-recommended drain intervals.

Package sizes:




[13]See page 50 for Proposition 65 information for this product.

DCT




## 100% Synthetic DCT Fluid (DCT)

Designed to protect high-tech dual-clutch transmissions during the most intense, high-heat operating conditions.

QUART

MTG




## Synthetic Manual Transmission and Transaxle Gear Lube (MTG)[15]

Provides improved internal component protection. Formulated with extreme-pressure additives and advanced frictional qualities that provide smooth shifts while protecting gears, bearings and seals. Non-corrosive to yellow metals.

Package sizes:

EASY-PACK QUART

QUART

MTF




## Synthetic Synchromesh Transmission Fluid (MTF)

Specifically designed to deliver smooth shifts and superior wear protection in manual transmissions and transaxles with synchronizers.

QUART

[15]See page 50 for Proposition 65 information for this product.

ART




## Super Shift® Racing Transmission Fluid (ART)[17]

Formulated to prevent slippage and reduce heat in high-performance, high-horsepower vehicles.

QUART

ATD




## Torque-Drive® Synthetic Heavy-Duty Automatic Transmission Fluid (ATD)[31]

Premium fluid designed for use in both on- and off-highway heavy-duty equipment.

Package sizes:

1 GALLON

2.5 GALLONS

ATH




## Synthetic Tractor/Hydraulic Transmission Oil (ATH)[13]

Formulated for combinations of transmissions, hydraulic systems, final drives, power take-off systems and wet brakes in heavy-duty farm and industrial equipment as well as commercial and residential lawn tractors.

QUART

[17, 31, 13]See page 50 for Proposition 65 information for this product.










## SEVERE GEAR® Synthetic EP Gear Lube

Specifically engineered for high-demand applications, including trailer towing, heavy hauling, 4x4 off-road driving, commercial use and racing.

**75W-85** • SVL
**Top fuel efficiency and cold-temperature performance**

**75W-90** • SVG
**Outstanding fuel efficiency and cold-temperature performance**

**80W-90**[13] • AGL
**Excellent extreme-pressure performance and wear protection**

**75W-110** • SVT
**Extra viscosity protection without sacrificing fuel efficiency**

**75W-140** • SVO
**Maximum viscosity protection for severe-duty applications**

Package sizes:




Whoever invented the easy-pack concept is a genius. Especially for servicing transfer cases and differentials. It lives up to its name. Not only an innovative oil, but innovative packaging as well.

**– Joey**
*Calif.*

[13]See page 50 for Proposition 65 information for this product.

SRT




## SEVERE GEAR® SAE 250 EP Synthetic Racing Gear Lube (SRT)[28]

Engineered specifically for the demands of severe racing conditions, including off-road truck racing, rock racing, rock crawling, tractor pulling, funny car racing and dragster racing applications.

QUART

FGR




## 75W-90 Long Life Synthetic Gear Lube (FGR)[13]

Specifically engineered for extended drain intervals up to 500,000 miles as set by equipment manufacturers for over-the-road trucks and heavy equipment.

Package sizes:

QUART GALLON

ADA




## Slip Lock® Differential Additive (ADA)[21]

Designed to eliminate gear-housing chatter in cars, trucks and SUVs equipped with limited-slip differentials.

***Note:*** *AMSOIL synthetic gear lubes do not require the use of this additive. However, not all differentials respond the same and if chatter is noticed, the addition of AMSOIL Slip Lock will eliminate it.*

4.0 OUNCE TUBE



G2039


## Easy Installation

Hand Pump (G2039)

[28, 13, 21]See page 50 for Proposition 65 information for this product.

## 99% Efficiency at 20 Microns

Filtering particles >20 microns fights engine wear.[AA]

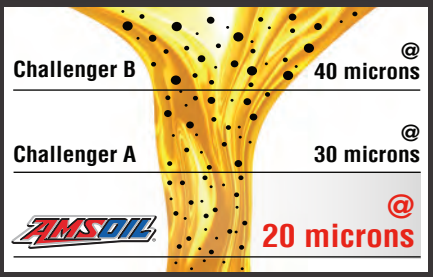


[AA]*In accordance with industry-standard ISO SO 4548-12.*




## Oil Filters (EAO/EA15K)

AMSOIL Oil Filters rank among the highest efficiency filters available to the auto/light-truck and powersports markets, providing a filtering efficiency of 99 percent at 20 microns. Featuring advanced full-synthetic technology, AMSOIL Oil Filters provide greater efficiency, capacity and durability than cellulose filters, extending engine and filter life and reducing engine wear.

- Oil Filters designated with product code EA15K are recommended for 15,000 miles/one year, whichever comes first, in normal or severe service. NOTE: Change oil filter at every oil change.
- Oil Filters designated with product code EAO are recommended for 25,000 miles/one year, whichever comes first, in normal service or 15,000 miles/one year, whichever comes first, in severe service. NOTE: Change oil filter at every oil change.



**Which filter do I need?**

Check the product guides at AMSOIL.com, call 1-800-777-7094 (Monday-Friday, 7 a.m. - 7 p.m. Central Time) or contact the AMSOIL Dealer listed on the back of your catalog (if one is listed) to determine the appropriate filter for each application. When AMSOIL Oil Filters are used with a motor oil other than AMSOIL motor oil the filter should be changed according to the vehicle manufacturer recommendation.

Fill in your vehicle information. Then call 1-800-777-7094 (Monday – Friday, 7 a.m. – 7 p.m. Central Time). You may also contact the AMSOIL Dealer listed on the back of your catalog (if one is listed) to determine your appropriate oil and air filters.

**Make** _____ **Year**_____ **Model**_____ **Engine**_____

**VIN**_____

**Your Oil Filter is** _____

**Your Air Filter is** _____

AMSOIL

PROTECTION *you demand.* | PERFORMANCE *you deserve.™*

## More Premium Filters

AMSOIL offers a variety of specialty oil filters constructed with premium synthetic technology. Check the Product Guides at AMSOIL.com or call (715) 399-8324 (TECH) (Monday-Friday, 8 a.m. - 5 p.m. Central Time) for application information.

EAHD



### Heavy-Duty Extended-Life Oil Filters • EAHD

Provide excellent 99 percent filtering efficiency at 20 microns and high contaminant capacity for heavy-duty on- and off-road diesel and gasoline applications. Provide extended service intervals that coincide with the maximum drain intervals of AMSOIL synthetic engine oils.

BMK





### Bypass Filtration

High-efficiency bypass filters effectively remove minute dirt particles and soot by working in conjunction with the engine's full-flow oil filter.

**BYPASS OIL FILTRATION SYSTEMS • BMK**
Single-Remote Bypass Kit (BMK21)
DUAL-GARD Bypass Kit (BMK22)
Universal Dual-Remote Bypass System (BMK23)
Ford 7.3L Dual-Remote Bypass System (BMK26)
2001-2019 GM 6.6L Dual-Remote Bypass System (BMK27)
Ford 6.7L Dual-Remote Bypass System (BMK28)
Heavy-Duty Bypass Kit (BMK30)
Ford 6.0/6.4L Single-Remote Bypass System (BMK31)
2001-2016 GM 6.6L Single-Remote Bypass System (BMK32)
Ford 6.7L Single-Remote Bypass System (BMK33)
2004-current Cummins 5.0L/5.9L/6.7L Single-Remote Bypass System (BMK34)

**BYPASS OIL FILTERS • EABP**
6" Filter (EABP90)
7.5" Filter (EABP100)
10.5" Filter (EABP110)
Heavy-Duty Filter for BMK30 (EABP120)

EAOM



### Powersports Oil Filters (EAOM)

High-efficiency filters available for the motorcycle and powersports market. Provide excellent 99 percent filtering efficiency at 20 microns. Available in black or chrome (as available).

GRG




## DOMINATOR® Synthetic Racing Grease (GRG)[21]

High-performance bearing and chassis lubrication for all race applications on snow, dirt, water and track. Designed for bearings that operate under high-speed, high-heat or low-temperature conditions.

CARTRIDGE

GPOR1 GPOR2




## Synthetic Polymeric Off-Road Grease

Extreme-pressure, moly-fortified grease that provides outstanding protection for heavy-load-bearing applications, including steering knuckles, spring shackles, heavy equipment pivot joints and other components operating in high-load, low-speed conditions.

**Synthetic Polymeric Off-Road Grease[36]** • GPOR1
*Use in applications that require NLGI No. 1, 5% Moly*

**Synthetic Polymeric Off-Road Grease[36]** • GPOR2
*Use in applications that require NLGI No. 2, 5% Moly*

CARTRIDGE

GPTR1 GPTR2




## Synthetic Polymeric Truck, Chassis and Equipment Grease

Delivers excellent wear protection and performance in severe-service, extreme-pressure environments such as axle assemblies, U-joints, pivot pins, fifth-wheel plates, steering linkages, kingpins, water pump bearings, ball joints and other greasable bearings and chassis components.

**Synthetic Polymeric Truck, Chassis and Equipment Grease[35]** • GPTR1
*Use in applications that require NLGI No. 1*

**Synthetic Polymeric Truck, Chassis and Equipment Grease[35]** • GPTR2
*Use in applications that require NLGI No. 2*

CARTRIDGE

[21, 36, 35]See page 50 for Proposition 65 information for this product.

GLC




## Synthetic Multi-Purpose Grease (GLC)[17]

Delivers premium wear protection for bearings, bushings, chassis lubrication and other applications.

*Use in applications that require NLGI No. 2*

CARTRIDGE

GWR




## Synthetic Water-Resistant Grease (GWR)

Provides outstanding water-washout and spray-off resistance for applications frequently exposed to water, mud, snow or ice.

*Use in applications that require NLGI No. 2*

CARTRIDGE

GXC




## X-Treme Synthetic Food Grade Grease (GXC)

Designed for high levels of protection in food and pharmaceutical industry equipment. NSF-approved formula (formerly USDA H-1) for incidental contact with food.

*Use in applications that require NLGI No. 2*

CARTRIDGE

[17]See page 50 for Proposition 65 information for this product.

GSP




## Spray Grease (GSP)

Applies quickly and evenly and is ideal for greasing hard-to-reach equipment, including hinges, springs, industrial chains, latches, slides, winches and other common applications.

10.0 OUNCE
SPRAY CAN

AIR




## Synthetic Air Tool Oil (AIR)[13]

Effectively lubricates rotary and piston-type air-tool bearings and motors, while managing moistureand conditioning rubber and plastic seals and O-rings.

4.0 OUNCE
BOTTLE

ABC




## Semi-Synthetic Bar and Chain Oil (ABC)[17]

Delivers excellent lubrication and protection, helping extend the life of bar and chain applications.

Package sizes:

QUART GALLON

[13, 17]See page 50 for Proposition 65 information for this product.

PCI




## Synthetic Compressor Oil

Superior protection for rotary screw, rotary vane, reciprocating and other compressor applications.

**ISO 46, SAE 20[13]** • PCI
**ISO 100, SAE 30/40** • PCK

QUART

AST




## Gasoline Stabilizer (AST)[13]

Helps prevent the formation of varnish and sludge in stored seasonal equipment such as snowmobiles, lawnmowers, motorcycles and boats. One ounce treats 2.5 gallons of fuel.

16.0 OUNCE BOTTLE

## AMSOIL Fights Corrosion

AMSOIL provides corrosion protection Sea Foam* Motor Treatment can't match, helping maintain power and performance and keeping metal corrosion free, even when subjected to salt water.[X]




*Based on independent third-party testing of AMSOIL Gasoline Stabilizer obtained July 1, 2022, and Sea Foam Motor Treatment purchased June 30, 2022, in a modified NACE TM0172 using synthetic sea water per ASTM D665B.

[13]See page 50 for Proposition 65 information for this product.


UCL




## Upper Cylinder Lubricant Gasoline Additive (UCL)[13]

Lubricates fuel system and upper cylinders. Fights ethanol-related corrosion. Helps keep injectors clean. Bottle compatible with capless fuel systems. Use entire bottle at every fill-up.

6.0 OUNCE BOTTLE

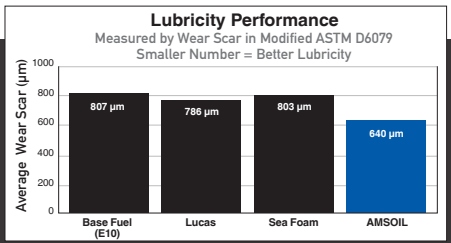


## Preserves Horsepower and Performance

AMSOIL delivers 18 percent more lubricity than Lucas* and 20 percent more than Sea Foam* for better retention of horsepower and fuel economy.[R]

[R]Based on independent testing of AMSOIL Upper Cylinder Lubricant, Lucas Upper Cylinder Lubricant and Sea Foam Motor Treatment obtained on 02/13/2019 using the ASTM D6079 modified for use with gasoline. *All trademarked names and images are the property of their respective owners and may be registered marks in some countries. No affiliation or endorsement claim, express or implied, is made by their use.

API




INDUSTRY'S MOST **ADVANCED** FORMULATION


## P.i.® (API)[13]

Restores up to 14 percent horsepower.[NN] Bottle compatible with capless fuel systems. Add entire bottle to tank at fill-up.


12.0 OUNCE BOTTLE

## AMSOIL Restores Horsepower

AMSOIL P.i.® restores up to 14% horsepower.[NN]

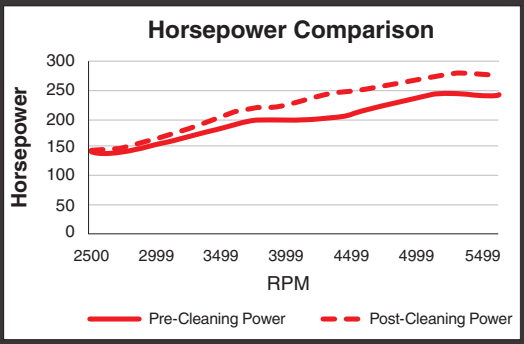


*[NN]Based on third-party testing in a 2016 Chevrolet* Silverado* 1500, 5.3L V-8 GDI with 100,616 miles, using one tank treated with AMSOIL P.i. Actual results may vary. *All trademarked names and images are the property of their respective owners and may be registered marks in some countries. No affiliation or endorsement claim, express or implied, is made by their use.*



**Injector before P.i. treatment.**



**Injector after one P.i. treament.**



**Cylinder head before P.i. treatment.**



**Cylinder head after one P.i. treament.**

[13]See page 50 for Proposition 65 information for this product.

AQS




**Addresses Ethanol-Related Performance issues**

**DIRECTIONS:** One bottle treats up to 6 gallons for cleanup and up to 12 gallons for continued protection. For best results use with every tank.

## Quickshot® (AQS)

Effectively addresses performance issues related to ethanol, water and dirty pump gas in two- and four-stroke gasoline-powered engines and powersports equipment fuel systems, restoring peak performance.

**Motorcycles • Snowmobiles • Boats • ATVs • Edgers • Tillers • Mowers • Snowblowers • Chainsaws • Generators • Farm & Construction Equipment • and more**

Package sizes:

8.0 OUNCE BOTTLE

QUART




**Phase separation is when ethanol/water mixtures fall to the bottom of fuel tanks and containers, leading to lean-burn conditions.**

**Quickshot helps keep water molecules dispersed to prevent phase separation.**

Degraded fuel can present a major maintenance issue in motorcycle engines, forming varnish, gum and insoluble debris that clog carburetors, fuel injectors and fuel filters. Carbon buildup can form on the tops of pistons resulting in pre-ignition, rough idling and poor throttle response. Fuel-related problems are only expected to intensify in the coming years as the ethanol content in pump gasoline continues to increase.

AMSOIL Quickshot® (AQS) is a premium fuel additive formulated to thoroughly clean and restore peak performance in motorcycle and powersports equipment fuel systems. It also stabilizes fuel between uses and during short-term storage periods.

AOB

MOB




## DOMINATOR® Octane Boost (AOB)[21]

Improves the performance of all two- and four-stroke gasoline-fueled engines. Treats up to 15 gallons of gasoline.

12.0 OUNCE BOTTLE

## Motorcycle Octane Boost (MOB)[21]

Increases octane up to three numbers for maximum power and efficiency in motorcycles. Treats 4-6 gallons of gasoline.

4.0 OUNCE BOTTLE

DRC

ADD




## Diesel Recovery (DRC)[38]

Emergency diesel fuel treatment that liquefies gelled diesel fuel and thaws frozen fuel filters. Keep a bottle on hand for emergencies. One ounce treats up to 1 gallon of fuel.

30.0 OUNCE BOTTLE

## Diesel Cold Flow (ADD)[38]

Effectively modifies wax crystal formation at low temperatures to depress diesel fuel pour point, prevent wax settling and improve cold-flow filtration properties. Lowers cold filter-plugging point (CFPP) by up to 40°F (22°C) in ultra-low-sulfur diesel (ULSD). One ounce treats up to 5 gallons of fuel.

16.0 OUNCE BOTTLE

ACB




## Diesel Cetane Boost (ACB)

Raises the cetane number of diesel fuel up to eight points for maximum horsepower, increased fuel economy and easier starts in all diesel engines. Diesel engines operate best on fuel with cetane values of 50 or higher. Most diesel fuel sold in North America has a cetane value of 40-45. One ounce treats up to 10 gallons of fuel.

Package sizes:

16.0 OUNCE BOTTLE

64.0 OUNCE BOTTLE

[21, 38]See page 50 for Proposition 65 information for this product.

ADB




## Diesel 4-IN-1 (ADB)[38]

Combines the superior deposit-removing properties of Diesel Injector Clean, the excellent anti-gelling properties of Diesel Cold Flow and the cetane-boosting benefits of Diesel Cetane Boost in one convenient package. One ounce treats up to 2.5 gallons of fuel.

Package sizes:

8.0 OUNCE BOTTLE | 16.0 OUNCE BOTTLE | 64.0 OUNCE BOTTLE

ADS




## Diesel Injector Clean + Cetane Boost (ADS)[21]

Combines the superior deposit-removing properties of Diesel Injector Clean with the cetane-boosting benefits of Diesel Cetane Boost in one convenient package. One ounce treats up to 5 gallons of fuel.

Package sizes:

8.0 OUNCE BOTTLE | 16.0 OUNCE BOTTLE | 64.0 OUNCE BOTTLE

ADF




**UP TO 8%** FUEL ECONOMY IMPROVEMENT

## Diesel Injector Clean (ADF)[19]

Targets traditional nozzle deposits, combustion chamber deposits and internal diesel injector deposits found in HPCR injectors. Lubricates to reduce fuel pump and injector wear. Concentrated for rapid results, maximum horsepower and up to 8 percent increased fuel economy in engines with accumulated deposits. One ounce treats up to 5 gallons of fuel.

Package sizes:

8.0 OUNCE BOTTLE | 16.0 OUNCE BOTTLE | 64.0 OUNCE BOTTLE

[38, 21, 19]See page 50 for Proposition 65 information for this product.

AFO




ACL




## Air Filter Oil (AFO)

Quickly penetrates foam air filters to help prevent dirt and water contamination and provide maximum clean airflow to the engine. Tacky formula provides superior adhesion that prevents fluid pooling in the airbox and traps dirt, sand and grit.

14.0 OUNCE SPRAY CAN

## Chain Lube (ACL)

Provides outstanding protection against wear and corrosion. Helps extend chain life. Does not attract dirt and does not fling off. Fast-drying.

Package sizes:

4.5 OUNCE SPRAY CAN

11.0 OUNCE SPRAY CAN

FOG




APF




## Engine Fogging Oil (FOG)[13]

Helps prevent corrosion and dry starts to internal engine components found in outboard motors, lawn and garden equipment, motorcycles, snowmobiles, ATVs, motor homes and generators during storage or long periods of inactivity.

12.0 OUNCE SPRAY CAN

## Power Foam® (APF)[21]

Improves starting and performance by cleaning dirty intake systems and spark plugs, freeing sticky valves and removing gum, varnish and carbon deposits.

18.0 OUNCE SPRAY CAN

ADG




## Heavy-Duty Degreaser (ADG)

Formulated with powerful and fast-acting solvents, attacking petroleum-based grime on a molecular level to loosen its hold on metal, concrete and other surfaces.

15.0 OUNCE SPRAY CAN

[13, 21]See page 50 for Proposition 65 information for this product.

ALS




## Silicone Spray (ALS)[13]

Perfect for lubricating or protecting rubber, nylon, plastics, upholstery, vinyl, wood, cardboard or fiberglass. Also excellent for waterproofing leather products. Hundreds of household uses.

10.0 OUNCE
SPRAY CAN

AMS




## Mudslinger® (AMS)

Provides a protective layer of armor against the accumulation of mud, dirt and snow on ATVs, UTVs and dirt bikes, easing clean-up.

12.0 OUNCE
BOTTLE







**Mudslinger makes an old machine look new again.**

AED




## Engine Degreaser (AED)

Effectively cleans engine surfaces by cutting through grease, oil and grime, making engines look new again.

15.0 OUNCE
SPRAY CAN

AGC




## Glass Cleaner (AGC)

Cuts through grease and grime faster than other leading glass cleaners, stays where you spray it and leaves no streaks.

19.0 OUNCE
SPRAY CAN

[13]See page 50 for Proposition 65 information for this product.

FLPSC




FLPBA




## Synthetic Firearm Lubricant and Protectant (FLP)

Effectively lubricates and protects firearms, helping extend life and prevent blockage, jams and wear. Outstanding protection and performance in both hot and cold climates. Specifically formulated for firearms, offering superior performance over multi-purpose products.

Package sizes:

4.0 OUNCE BOTTLE

5.0 OUNCE SPRAY CAN

FCPCN




FCPSC




## Firearm Cleaner and Protectant (FCP)

Penetrates deep into hard-to-reach components, effectively cleaning fouling and powder residue from all firearm surfaces, safely protecting them for storage, reducing jamming and increasing reliability. Protects against corrosion, allowing for safe storage and preserving performance, reliability and value.

Package sizes:

5.0 OUNCE SPRAY CAN

8.0 OUNCE BOTTLE

"It's a great product to keep your firearms/ shotguns in great working order & protect from our harsh weather elements."

**– Steve**
*Pratts Fork, Ohio*

AMP




AMH




## Metal Protector (AMP)

Displaces water, penetrates and protects metal surfaces from corrosion, including hinges, squeaky mechanical objects, electrical systems and more.

Package sizes:

4.0 OUNCE SPRAY CAN

8.75 OUNCE SPRAY CAN

## Heavy-Duty Metal Protector (AMH)[13]

Penetrates and adheres to metal surfaces, leaving a long-lasting coating that protects against the damaging effects of salt, moisture or chemical corrosion.

15.0 OUNCE SPRAY CAN

[13]See page 50 for Proposition 65 information for this product.

FLSH




## Engine and Transmission Flush (FLSH)

Helps restore operating efficiency, increase fuel economy and reduce emissions in gasoline and diesel engines and automatic transmissions.

16.0 OUNCE BOTTLE

PSF




## Multi-Vehicle Synthetic Power Steering Fluid (PSF)[13]

Provides excellent wear protection, long component life and quiet operation in most passenger cars and light trucks.

16.0 OUNCE BOTTLE



### Fluid Extraction Pump (G2576)

Aids in the removal of power steering fluid, motor oil, drivetrain lubricants and engine coolant. Can also be used to install fresh lubricants in hard-to-reach areas.

RDCB




## DOMINATOR® Coolant Boost (RDCB)

Helps reduce engine temperatures, increase horsepower, promote faster engine warm-up times and reduce radiator and engine corrosion in racing and passenger vehicles.

16.0 OUNCE BOTTLE

PSAF




## Powersports Antifreeze & Coolant (PSAF)[15]

Advanced design helps control operating temperature in hot-running, high-revving powersports applications. Extended-life formula provides all-season protection for up to five years.

QUART

[15, 13] See page 50 for Proposition 65 information for this product.

ANT




ANTPC




## Propylene Glycol Antifreeze & Coolant (ANT)

All-climate protection for up to 150,000 miles or 5 years, whichever comes first, in passenger cars and light trucks. Protection up to 1,000,000 miles, 20,000 hours or 8 years, whichever comes first, in heavy-duty applications. Concentrated formula.

1 GALLON

## Passenger Car/Light Truck Antifreeze & Coolant (ANTPC)[29]

Engineered to exceed original equipment manufacturer (OEM) requirements for up to 150,000 miles or 5 years, whichever comes first, in passenger cars and light trucks. Pre-mixed formula.

1 GALLON

### AMSOIL Resists Corrosion

In third-party, industry-standard testing, cast-iron and copper plates protected by AMSOIL showed virtually **no signs of corrosion**.[HH]

*[HH]Based on results of the ASTM D2570 corrosion test.*





### AMSOIL Resists Cavitation

In third-party, industry-standard testing, cylinder liners protected by AMSOIL showed virtually **no signs of cavitation**.[II]

*[II]Based on results of the ASTM D7583 cavitation test.*

ANTHD




## Heavy-Duty Antifreeze & Coolant (ANTHD)[29]

Provides superior heat transfer and excellent protection against corrosion, cylinder-liner cavitation, freezing and boilover. Protection up to 1,000,000 miles, 20,000 hours or 8 years, whichever comes first. Pre-mixed formula.

1 GALLON

**Antifreeze Test Strips (G1164)**

*To test freeze protection and additive concentration, order antifreeze test strips:*

[29]See page 50 for Proposition 65 information for this product.

HFBCN CSFCN




## High-Foam Car Shampoo (HFB)

Powerful pH-neutral formulation delivers exceptional cleaning action without harming coatings and finishes.

16.0 OUNCE BOTTLE

## Ceramic Spray (CSF)

Advanced Si02 ceramic technology enhances gloss and protects painted and plastic surfaces for up to 12 months with a simple spray-on, wipe-off application.

16.0 OUNCE BOTTLE

IDLCN IDNCN




## Interior Detailer

Cleans plastic, trim, dashes and displays without streaks or greasy residue.

**Interior Detailer - Lemon** • IDL
**Interior Detailer - Unscented** • IDN

16.0 OUNCE BOTTLE

## Quick Detailer (QDS)

A specially blended formula of surfactants lifts light dust and debris from painted and plastic surfaces with a quick spray-on, wipe-off application for easy detailing between washes.

16.0 OUNCE BOTTLE

QDSCN WTCCN




## Wheel + Tire Cleaner (WTC)

pH-balanced 2-in-1 formula removes brake dust, road grime and tire blooming without harming wheels or tires.

16.0 OUNCE BOTTLE

TTPCN




## Tire + Trim Protectant (TTP)

Advanced, non-greasy formula conditions rubber and exterior plastic trim for a long-lasting satin or gloss finish, with quick-drying, low-sling properties and UV protection.

16.0 OUNCE BOTTLE

## Accessories

Foam Cannon (G3911)
Detailing Towel 2-Pack (G3912)
Drying Towel (G3913)
Microfiber Wash Mitt (G3914)

BFLV




## DOT 3 & 4 Synthetic Brake Fluid (BFLV)[33]

High-performance brake fluid specially designed as a multi-use product for passenger-car, light-truck and powersports applications.

12.0 OUNCE BOTTLE

BPC




## DOMINATOR DOT 4 Synthetic Racing Brake Fluid (BFR)[10]

High boiling point brake fluid engineered to resist brake fade and vapor lock during intense racing applications.

12.0 OUNCE BOTTLE

BFR




## Brake and Parts Cleaner (BPC)[32]

Professional-strength parts cleaner that quickly removes oil, grease, brake fluid and other contaminants from brake parts and other automotive components.

19.0 OUNCE SPRAY CAN

[33, 10, 32]See page 50 for Proposition 65 information for this product.




## Non-Chlorinated Brake & Parts Cleaner (NCBC)

Removes oil, grease, brake fluid and other contaminants from brake parts and other automotive components. Cleans brake parts with no major disassembly and leaves no residue, helping reduce brake squeal and chatter.

14.0 OUNCE
SPRAY CAN

## Miracle Wash® Waterless Wash & Wax (AMW)

Unique dry car wash and polish delivers outstanding performance and quick, easy and economical application. No water required.

13.0 OUNCE
SPRAY CAN

## Aftermarket Partners

AMSOIL also offers premium filtration products from its aftermarket partners, including Donaldson, WIX and MANN FILTER.

For product and pricing information, call 1-800-777-7094 (Monday - Friday, 7 a.m. -7 p.m. Central Time) or contact the AMSOIL Dealer listed on the back of your catalog (if one is listed).

Donaldson. Filtration Solutions

MANN FILTER

WIX FILTERS

## The Company of FIRSTS

**More than 45 Years of Innovation and Leadership**

**FIRST** API-qualified 100 percent synthetic motor oil.

**FIRST** to introduce the concept of "extended drain intervals" with a recommended 25,000-mile/12-month drain interval.

**FIRST** synthetic gear lube for automotive use.

**FIRST** synthetic motor oil for diesel engines.

**FIRST** synthetic motor oil for racing engines.

**FIRST** synthetic motor oil for turbocharged engines.

**FIRST** synthetic motor oil for marine engines.

**FIRST** 100:1 pre-mix synthetic 2-cycle oil.

**FIRST** synthetic automatic transmission fluid for automotive use.



# CALIFORNIA PROPOSITION 65 ⚠WARNING STATEMENTS⚠

[10]⚠**WARNING:** This product can expose you to 2,2'-Iminodiethanol, which is known to the State of California to cause cancer, and Ethanediol, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

[13]⚠**WARNING:** This product can expose you to Benzene, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

[15]⚠**WARNING:** This product can expose you to Ethanediol, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

[17]⚠**WARNING:** This product can expose you to Ethylbenzene, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.

[18]⚠**WARNING:** This product can expose you to Ethylene oxide, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

[19]⚠**WARNING:** This product can expose you to Naphthalene, which is known to the State of California to cause cancer, and Methanol which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

[21]⚠**WARNING:** This product can expose you to Naphthalene, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.

[23]⚠**WARNING:** This product can expose you to Toluene, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

[27]⚠**WARNING:** This product can expose you to Di(2-ethylhexyl)phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

[28]⚠**WARNING:** This product can expose you to Ethylbenzene, which is known to the State of California to cause cancer, and Toluene, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

[29]⚠**WARNING:** This product can expose you to Ethylene Glycol, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

[31]⚠**WARNING:** This product can expose you to Benzene and Lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

[32]⚠**WARNING:** This product can expose you to Tetrachloroethylene, which is known to the State of California to cause Cancer. For more information go to www.P65Warnings.ca.gov.

[33]⚠**WARNING:** This product can expose you to Diethanolamine, which is known to the State of California to cause cancer, and 2-Methoxyethanol, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

[35]⚠**WARNING:** This product can expose you to chemicals including Crystalline Quartz Silica, Naphthalene and Ethylbenzene, which are known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.

[36]⚠**WARNING:** This product can expose you to chemicals including Crystalline Quartz Silica and Naphthalene, which are known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.

[37]⚠**WARNING:** This product can expose you to chemicals such as Lead, which is known to the State of California to cause cancer, birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

[38]⚠**WARNING:** This product can expose you to chemicals such as naphthalene, which is known to the State of California to cause cancer, and chemicals such as toluene, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

**PROTECTION** *you demand.* | **PERFORMANCE** *you deserve.™*

**AMSOIL INC.**
1 AMSOIL Center
Superior, WI 54880

WE HONOR

(Discover in U.S. only)

## Your Servicing AMSOIL Dealer

Refer to this referral number to save time and make ordering easier. Call toll-free at 1-800-777-7094. Credit card orders only. ▼

**0**

**Referral #**_____