

\$1 U.S.



Factory-Direct Catalog



Free Shipping on Orders of \$100 or More. See page 3 for details.

TO ORDER: 1-800-777-7094 MONDAY – FRIDAY 7 A.M. – 7 P.M. CT | **AMSOIL.com**



Product Index

Motor Oil	4
European Motor Oil	8
Classic/Collector Car Motor Oil	9
Racing Oil	10
Diesel Oil	11
Oil Analysis	13
ATV/UTV Oil	15
Snowmobile Oil/Dirt Bike Oil/ Suspension Fluid	16
Motorcycle Oil	17
Scooter Oil	19
Briggs & Stratton Synthetic 4T Racing Oil	20
Marine Oil	21
2-Stroke Oil	23
Chaincase & Gear Oil	24
Small-Engine Oil	25
Transmission Fluid	26
Gear Lube	30
Filters	32
Grease	34
Air Tool Oil/ Bar and Chain Oil	36
Compressor Oil/Fuel Additives	37
Cleaners and Protectants	42
Power Steering Fluid/Coolant Boost/Coolant	45
Car-Care Products	47
Brake Fluid/Brake and Parts Cleaner	48
Waterless Wash & Wax/ Aftermarket Partners	49

*All trademarked names and images are the property of their respective owners and may be registered marks in some countries. No affiliation or endorsement claim, express or implied, is made by their use.



All AMSOIL lubricants and filters are covered by the AMSOIL Limited Warranty. For details visit [AMSOIL.com/warranty.aspx](https://www.amsoil.com/warranty.aspx).

Power Big Savings with Preferred Customer Membership

Preferred Customers Enjoy



Reduced Pricing

Up to 25% off every order



Free Shipping

On orders over \$100



\$5 Back

Get a \$5 coupon with every \$100 you spend



Free Membership

When you spend \$500 in a year



Birthday Gift

Celebrate your day with \$5 off



Exclusive Promotions

Throughout the year

Plus, you will receive the quarterly *AMSOIL Magazine* with the latest product details, technical information and more.

**Six-month trial membership just \$10.
Full year of membership for just \$20.**

Sign up at AMSOIL.com/pc today and use this referral number. ▼

323230

Referral # _____

TECHNICAL QUESTIONS

(715) 399-8324 (TECH) or
tech@AMSOIL.com

SHIPPING AND HANDLING

Contiguous U.S. – Free shipping on orders of \$100 or more in the contiguous U.S. Orders below that threshold pay a flat shipping rate of \$9.99. Exclusions apply. See the shipping & handling policy at AMSOIL.com/storefront/shippinginformation.aspx.

Alaska – Add 7.5 percent to product prices for extra freight expenses. See Shipping Info at AMSOIL.com/storefront/shippinginformation.aspx.

Hawaii – Orders are shipped using the most cost-effective method and actual freight charges will be applied when orders are shipped. See Shipping Info at AMSOIL.com/storefront/shippinginformation.aspx for additional details.

Military Post Boxes – AMSOIL INC. ships orders to APO and FPO addresses for customers' personal use only. Orders are shipped using U.S. Mail Parcel Post and will be charged actual freight costs, which will be charged at the time the order is shipped. See Shipping Info at AMSOIL.com for additional details.

PRODUCT DAMAGED DURING SHIPPING

If there is visible damage to your order upon delivery, refuse the order. It will be returned to AMSOIL INC. for inspection and a new order will be sent at no extra charge to you. If you discover hidden damage after accepting delivery of your order, call 1-800-777-7094 for instructions.

SALES TAX INFORMATION

AMSOIL INC. is required to collect state, city, county and other taxes. AMSOIL also collects any additional taxes on lubricating products required by certain states.


Prices subject to change without notice.

WHY BUY SIGNATURE SERIES?

Signature Series Delivers Powerful Protection


AMSOIL delivers powerful protection. How good is it? An independent lab compared AMSOIL synthetic motor oil head-to-head against a leading competitor in a 100,000-mile test^F. AMSOIL provided far superior wear protection and kept bearings looking like new.

^FTesting conducted in an independent lab using AMSOIL Signature Series 5W-30 Synthetic Motor Oil and a leading synthetic-blend 5W-30 motor oil in Ford F-150 trucks with 3.5L twin-turbo engines.



Their Oil

AMSOIL

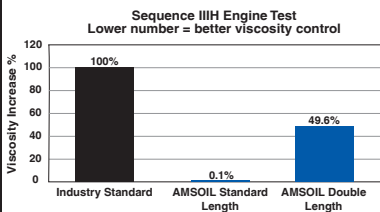

AMSOIL Resists Viscosity Increase

AMSOIL is barely challenged by the industry-standard testing, demonstrating only a 0.1% viscosity increase. Even when the test length is doubled, AMSOIL **delivered twice the viscosity control** required by the standard.^{GG}

^{GG}Based on independent testing of AMSOIL Signature Series 5W-30 in the Sequence IIH Engine Test (ASTM D8111), required by the ILSAC GF-6 and API SP specifications.



AMSOIL Keeps Pistons Cleaner

Even after doubling the length of the industry-standard test, AMSOIL delivered **40% cleaner pistons** than required by the standard.^{FF}

^{FF}Based on independent testing of AMSOIL Signature Series 5W-30 in the Sequence IIH Engine Test (ASTM D8111), required by the ILSAC GF-6 and API SP specifications.

Signature Series Protects Against LSPI

AMSOIL Synthetic Motor Oils achieved **100% protection** against LSPI.^B

^BBased on zero LSPI events in five consecutive tests of AMSOIL Signature Series, XL and OE 5W-30 Motor Oil in the LSPI engine test required by the GM dexos1 Gen 2 specification.

Signature Series Guards Turbos

Protects turbochargers **72% better** than required^C by the GM dexos1[®] Gen 2 specification.

^CBased on independent testing of AMSOIL Signature Series 5W-30 in the GM turbo coking test.

Signature Series Cleans

AMSOIL Signature Series Synthetic Motor Oil has **50% more** detergents^D to help keep oil passages clean and promote oil circulation. It provides **90% better protection** against sludge.^{DD}

^Dvs. AMSOIL OE Motor Oil ^{DD}Based on independent testing of AMSOIL Signature Series 5W-30 in the ASTM D6593 engine test for oil screen plugging as required by the API SN specification.

Signature Series Fights Wear

75% more engine protection against horsepower loss and wear.^A

^ABased on independent testing of AMSOIL Signature Series 0W-20 using the ASTM D6891 standard test.

SIGNATURE SERIES SYNTHETIC MOTOR OIL

Engineered for enthusiasts seeking maximum protection and performance. Precision-formulated with cutting-edge technology and a longstanding devotion to making the world's best motor oil. The result: engine protection that blows the doors off the highest industry standards. Guaranteed protection for up to 25,000 miles or 1 year, whichever comes first.



Package sizes:



QUART



GALLON

Extended-Life 100% Synthetic Motor Oil

Overbuilt for road warriors so you can confidently drive up to 20,000 miles or 1 year, whichever comes first, between oil changes. A proprietary combination of advanced synthetic base oils and a boosted additive package promotes cleanliness and prolonged engine life. AMSOIL Extended-Life protection delivers peace of mind and convenience. Provides **37% more cleaning power** to help keep your engine running smoother, longer.^{UU}



"Put this in my light duty, full size pickup. Noticeable difference right away. Engine quieter and clean."

– Jim P
Northern VA

Package sizes:



OE 100% Synthetic Motor Oil

Delivers 100% synthetic engine protection for advanced automotive technology, including turbos and direct injection. **Provides 47% more wear protection.**^a Specifically formulated for the longer drain intervals recommended by original equipment (OE) manufacturers.



Package sizes:



^{UU}Compared to AMSOIL OE Synthetic Motor Oil.

^aBased on independent testing of OE 0W-20 in the Peugeot TU3M Wear Test as required by the dexos1 Gen 2 specification.



100% Synthetic Hybrid Motor Oil

Custom formulation designed to combat the unique challenges posed by hybrid electric vehicles (HEV) and plug-in hybrid electric vehicles (PHEV), like frequent starts and stops and fuel dilution. It flows quickly to reach critical components when the engine engages. AMSOIL Hybrid Motor Oil features a robust viscosity that protects against the harmful effects of fuel dilution. Protects for up to 15,000 miles or 1 year, whichever comes first.¹



QUART

¹AMSOIL 0W-8 Hybrid Motor Oil is recommended for OEM-recommended drain intervals.

100% Synthetic High-Mileage Motor Oil

Designed specifically for the unique demands of high-mileage engines, helping extend the life of vehicles. It features a unique formulation that delivers extra detergency and a robust viscosity to clean and protect high-mileage engines with 75,000+ miles. It delivers purpose-built protection at a time in a vehicle's life where it could benefit from more-robust maintenance. AMSOIL High-Mileage Motor Oil cleans and protects engines with boosted detergency and an additive package that fights oil breakdown and oil leaks. Protects for up to 12,000 miles or 1 year, whichever comes first.



Package sizes:



QUART



GALLON

Synthetic European Motor Oil

Features precisely balanced formulations that consider the needs of modern exhaust treatment devices. It is important to use an oil that meets the proper specification to ensure optimum engine protection and performance.



EZT



AFE

0W-20 LS-VW Synthetic European Motor Oil³¹ • EZT

API SN PLUS, SN... • ACEA C5 • VW 508.00/509.00, TL52577 • Porsche C20

0W-20 LS Synthetic European Motor Oil • AFE

API SN PLUS (Resource Conserving), SN, SM... • ILSAC GF-5 • ACEA C5, A1/B1 • BMW LL-17FE+ • MB 229.71 • Ford WSS-M2C947-B1 • Opel/Vauxhall OV0401547 • Fiat 9.55535-GSX • Chrysler MS-12145 • Volvo VCC RBS0-2AE



EOT



AEL

0W-30 MS Synthetic European Motor Oil • EOT

Use in vehicles that require API SP, SN Plus, SN • ACEA C2/C3 • BMW LL-01FE • MB 229.31, 229.51, 229.52 • VW/Audi 504.00/507.00 • Porsche C30

5W-30 LS Synthetic European Motor Oil • AEL

Use in vehicles that require API SN, SM... • ACEA C3 • GM dexos2 • Chrysler MS-11106 • MB 229.51 • BMW LL-04 • Porsche C30 • VW 504.00/507.00



EFO



AFL

0W-40 FS Synthetic European Motor Oil¹³ • EFO

Use in vehicles that require ACEA A3/B3, A3/B4 • API SN, SM... • BMW LL-01 • MB 229.1, 229.3, 229.5 • Porsche A40 • Renault 0710, 0700 • VW/Audi 502.00/505.00

5W-40 MS Synthetic European Motor Oil • AFL

Use in vehicles that require ACEA C3 • API SN, SM, CF... • BMW Longlife-04 • Chrysler MS-10850 (supersedes MS-10896) • Ford WSS-M2C917-A • GM dexos2 (supersedes LL-A-025 and LL-B-025) • Renault 0710, 0700 • VW/Audi 502.00/505.01 • MB-Approval 229.51 • Porsche A40

5W-40 FS Synthetic European Motor Oil¹³ • EFM

Use in vehicles that require ACEA A3/B3, A3/B4 • API SN, SM... • BMW LL-01 • Renault 0710, 0700 • MB-Approval 229.5 • Porsche A40 • GM LL-B-025 • VW/Audi 502.00/505.00



EFM



ETS

10W-60 FS Synthetic European Motor Oil¹³ • ETS

Use in vehicles that require API SN • ACEA A3/B3, A3/B4

Package sizes:



QUART



GALLON

^{31,13}See page 50 for Proposition 65 information for this product.

BUILD IT.

CRUISE IT.



Assembly Lube (AEL)¹⁷

Formulated to cling to engine parts and provide exceptional wear protection in newly built or rebuilt high-performance, racing and other four-stroke engines.

Break-In Oil (BRK)¹⁷

Allows for quick and efficient piston ring seating in new and rebuilt high-performance and racing engines.

Z-ROD® Synthetic Motor Oil


High-zinc, high-phosphorus formulation engineered specifically for classic cars and performance vehicles.



¹⁷ See page 50 for Proposition 65 information for this product.

AMSOIL Delivers Superior Rust Protection

Competing Brand

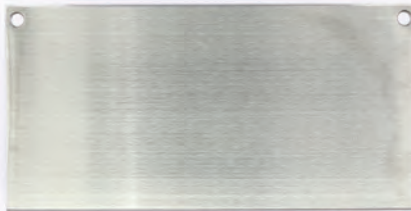

In industry-standard testing, AMSOIL Z-ROD® completely prevented rust formation while a leading competitor did not.¹¹

¹¹Based upon in-house testing of AMSOIL Z-ROD 10W-40 and a leading competitor obtained on 7/25/2019 in ASTM D1748-10.

RACE IT.

**PRODUCTS
THE
PROS USE**



Package sizes:



QUART



GALLON

DOMINATOR® Synthetic Racing Oil¹⁷

Superior performance and maximum protection in high-performance and racing applications.

¹⁷ See page 50 for Proposition 65 information for this product.



"AMSOIL products are the best on the market and definitely give us an added performance factor."

Bryce Menzies

Professional Off-Road Driver

20W-50 Synthetic Competition Diesel Oil¹³ • DCO

Delivers 50% more film thickness⁹ to withstand high cylinder pressures and protect against wear.

DCO



Package sizes:



QUART



GALLON



**FREEDOM
FACTORY**

**LPE
LINDENFELTER**
PERFORMANCE ENGINEERING



**TEAM O'NEIL
RALLY SCHOOL**



NRRA NATIONAL ROCK
RACING ASSOCIATION



⁹ Compared to the 3.5 cP HTHS limit for SAE 15W-40.

Signature Series Max-Duty Synthetic Diesel Oil¹³

Use in vehicles that require API CK-4, CJ-4 or CI-4+

Engineered for maximum protection and performance for diesel engines. **Provides 6X more engine protection.¹** Delivers up to 60% better turbo cleanliness² and withstands the extra demands you place on the turbo when pulling heavy loads or updating the tune for maximum horsepower. Provides up to 76% less oil consumption than required by the API CK-4 standard in the Caterpillar-1N oil consumption test. Provides up to 2X better rust protection.³



DELIVERS 4X BETTER
COLD-TEMPERATURE
PERFORMANCE⁴



Package sizes:



QUART



GALLON



2.5 GALLONS

¹Based on specification standards of CAT C13 2nd Ring Top Land Carbon testing. ²Based on industry standard testing using the NMMA FC-W Rust Test. ³than required by the Detroit Diesel DD13 Scuffing Test for Specification DFS 93K222 using 5W-30 as worst-case representation. ⁴When compared to SAE 15W-40 in ASTM D5293 Cold Cranking Viscosity Test.

¹³ See page 50 for Proposition 65 information for this product.

Competing Brand



Severely Scuffed Liner

AMSOIL



Non-Scuffed Liner

AMSOIL Fights Wear

AMSOIL delivers **powerful engine protection**. How good is it? In third-party testing compared to a leading brand, AMSOIL provided long-lasting wear protection, **keeping cylinder liners looking like new.**^{DD}

^{DD}Based on third-party testing of AMSOIL 5W-30 Signature Series Max-Duty Synthetic Diesel Oil and a leading conventional 15W-40 diesel oil using the Detroit Diesel® DD13 Scuffing test for specification DFS 93K222. ¹All trademarked names and images are the property of their respective owners and may be registered marks in some countries. No affiliation or endorsement claim, express or implied, is made by their use.



FLEECE
PERFORMANCE ENGINEERING



banks

DIESEL
MOTORSPORTS
www.DIESELMOTORSPORTS.US



Heavy-Duty Synthetic Diesel Oil¹³

Use in vehicles that require API CK-4, CJ-4 or CI-4+

Outstanding protection and performance for customers seeking an upgrade over conventional and other synthetic diesel oils. **Provides 4X more engine protection.¹** Provides up to 66% less oil consumption than required by the API CK-4 standard in the Caterpillar-1N oil consumption test.

ADN



ADO



ADP



Package sizes:



QUART



GALLON



GALLONS

¹than required by the Detroit Diesel DD13 Scuffing Test for Specification DFS 93K222 using 10W-30 as worst-case representation.

¹³ See page 50 for Proposition 65 information for this product.

FD1030



FD540



FD1540



AMSOIL/Fleece Freedom Series Synthetic Diesel Oil

NEW

Treat your diesel right with AMSOIL/Fleece Freedom Series Synthetic Diesel Oil. Freedom Series emerged when AMSOIL and Fleece Performance Engineering partnered to develop an advanced formulation for diesel pickup trucks equipped with Fleece products. Freedom Series Synthetic Diesel Oil provides excellent turbo cleanliness, superior soot control and outstanding wear protection. The result: protection engineered to perform.



QUART

FD1550



AMSOIL/Fleece Freedom Series 15W-50 Synthetic Racing Oil (FD1550)

NEW

Specifically engineered to deliver the most important benefits for high-horsepower and turbocharged competition diesel engines, including superior bearing protection and robust durability that withstands extreme pressures and temperatures.



QUART

FDBRK



AMSOIL/Fleece Freedom Series SAE 30 Break-In Oil (FDBRK)

NEW

The preferred break-in oil of Fleece Performance Engineering and Freedom Racing Engines. Designed to deliver maximum compression, horsepower and torque by providing quick and efficient piston ring seating in new and rebuilt high-performance and racing engines.



QUART

Oil Analysis

AMSOIL offers oil analysis service options from Oil Analyzers Inc. By analyzing used engine oil, a qualified lab can detect mechanical problems your equipment may have developed. For more information, visit www.oaitesting.com.

Sample Kit (includes two-way postage) (KIT01)

Sample Kit (includes UPS shipping) (KIT02)

Sample Kit (KIT06)

Value Sample Kit (KIT14)

All-In-One Sample Kit (KIT18)

Oil Suction Pump w/10-ft. hose (G1206)

Replacement Hose 25-ft. (G1571)

Oil Analyzers
INC.



100% Synthetic Diesel Oil

Engineered specifically for smaller American diesel pickups, vans, cars and SUVs, providing outstanding protection, performance and fuel economy. Delivers up to 6X better wear protection than required by a leading industry standard.¹

0W-20 • DP020

Use in vehicles that require GM dexosD



5W-30 • DP530

Use in vehicles that require GM dexosD, dexos2 • Chrysler MS-11106 • Ford WSS-M2C214-B1 • ACEA C3



Premium Protection Synthetic Motor Oil¹³

Ideal for older gasoline engines and pre-2007 diesel applications not equipped with diesel particulate filters (DPFs), where the extra protection of a high-zinc formula is desired.

Package sizes:



15W-40 Synthetic Heavy Duty Diesel and Marine Oil (AME)¹³

Engineered for pre-2007 on- and off-road diesel applications not equipped with diesel particulate filters (DPFs).

Use in vehicles that require API CI-4+

Package sizes:



¹Based on third-party testing in the OM646LA cam wear test using 0W-20 as worst-case representation.

¹³See page 50 for Proposition 65 information for this product

Like Heavy Duty Diesel and Marine Oil?

Try Signature Series Max-Duty 15W-40 for a serious upgrade. See page 11.

SYNTHETIC ATV/UTV MOTOR OIL

Formulated to provide upgraded performance and protection for hard-working and performance ATVs and UTVs.



Package sizes:



AUDT



Synthetic ATV/UTV Transmission & Differential Fluid (AUDT)¹⁸

Protects heavily loaded, high-torque ATV and UTV gears and bearings against wear in the most severe operating conditions. Convenient easy-pack helps access tough-to-reach fill holes, making the job faster and cleaner.

AUDCT



Synthetic ATV/UTV Dual-Clutch Transmission Fluid (AUDCT)

Provides superior anti-wear protection in the Can-Am Maverick[®] R dual-clutch transmission under heavily loaded, high-temperature operation.

AUCVT



Synthetic ATV/UTV Continuously Variable Transmission Fluid (AUCVT)

Engineered to maximize CVT performance and efficiency while protecting against wear during heavily loaded, high-temperature operation, so you can confidently and safely push your machine to its limit.

ATV/UTV Oil Change Kits (PK1/PK2/PK3/PK4/CK4/CK5/CK6)

Contains everything needed to perform an oil change on most Polaris[®] (PK) and Can-Am[®] (CK) UTVs and ATVs. Call (715) 399-8324 (TECH) (Monday-Friday, 8 a.m. - 5 p.m. Central Time) or contact the AMSOIL Dealer listed on the back of your catalog (if one is listed) to determine the appropriate kit for your application.



PK1

^{13, 18}See page 50 for Proposition 65 information for this product.



AUPT

Synthetic ATV/UTV Powertrain Fluid (AUPT)¹³

Purpose-built for transmission/differentials and front drives in Polaris* ATVs and UTVs, offering the perfect combination of protection and convenience.



QUART



AFF

Formula 4-Stroke® Powersports Synthetic Motor Oil (AFF)

Specially formulated for four-stroke recreational motors, including ATVs and snowmobiles.



QUART



SWAP
MOTO
RACE SERIES

SYNTHETIC DIRT BIKE OIL

Delivers confidence in clutch feel, maximum horsepower and superior wear protection in all types of four-stroke dirt bikes.

Synthetic Dirt Bike Transmission Fluid • DBTF



QUART

AMSOIL delivers confident clutch feel.

AMSOIL provides excellent clutch protection⁷. How good is it? In extreme simulated-start testing, AMSOIL provided superior wear protection and kept clutch plates looking new.



⁷Based on dyno testing of a Honda CRF450 dirt bike using AMSOIL 10W-40 Synthetic Dirt Bike Oil and a leading original equipment manufacturer 10W-40 conventional dirt bike oil.

DB40

DB50

DB60

DBTF



SHOCK THERAPY® SUSPENSION FLUID

Controls friction, heat, wear, foaming and scuffing in suspension components.

Lightweight #5¹³ • STL

Use in applications that demand quick rebounds under extreme temperatures.

Medium #10¹³ • STM

Use in applications that require more dampening and slower rebounds.



QUART



STL

STM

¹³See page 50 for Proposition 65 information for this product.



MVI

SYNTHETIC V-TWIN MOTORCYCLE OIL

20W-40 • MVI

Superior synthetic formulation provides long service life and maximum protection against engine wear in Indian* and Victory* motorcycles.



QUART



MCV

20W-50 • MCV

Superior synthetic formulation provides long service life and maximum protection against engine wear in Harley-Davidson,* Buell* and other motorcycle engines, primaries and transmissions.

Package sizes:



QUART



GALLON



MCS

SAE 60 • MCS

Superior synthetic formulation provides long service life and maximum protection against engine wear in big-bore, air-cooled motorcycle engines, including Harley-Davidson Panhead, Shovelhead and Knucklehead.



QUART



MSV

15W-60 • MSV

Superior synthetic formulation provides long service life and maximum protection against engine wear in Indian and Victory motorcycles.




QUART



Viscosity Breakdown

% viscosity loss in the CEC L45-KRL, ASTM D445, test

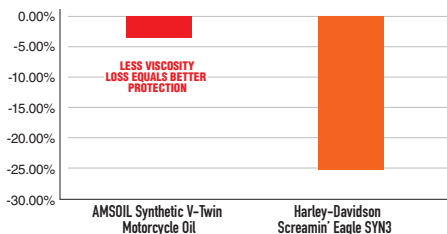

AMSOIL Resists Viscosity Breakdown

AMSOIL resists viscosity breakdown **6X better** than Harley-Davidson* SYN3* for improved protection against compensator and transmission gear wear.^{BB}

^{BB}Based on testing of AMSOIL 20W-50 Synthetic V-Twin Motorcycle Oil purchased on 3/19/19 and Harley-Davidson Screamin' Eagle SYN3 purchased on 3/19/19 in the CEC L45-KRL, ASTM D445 test. *All trademarked names and images are the property of their respective owners and may be registered marks in some countries. No affiliation or endorsement claim, express or implied, is made by their use.

MVT



Synthetic V-Twin Transmission Fluid (MVT)

Helps quiet V-twin transmission noise and enable smooth shifts.

Synthetic V-Twin Primary Fluid (MVP)

Delivers consistent clutch feel and helps riders easily find neutral.

MVP



QUART



QUART



V-Twin Oil Change Kits (HDCK/HDBK/HDMC/HDMB)

Contains everything needed to perform an oil change on most Harley-Davidson* motorcycles, including 20W-50 Synthetic V-Twin Motorcycle Oil, AMSOIL Motorcycle Oil Filter and O-ring.

FITMENT INFO:

HDCK, HDBK: most 1999-2016 Harley-Davidson motorcycles (HDCK includes chrome filter; HDBK includes black filter)

HDMC, HDMB: most 2017-present Harley-Davidson motorcycles (HDMC includes chrome filter; HDMB includes black filter)



SYNTHETIC METRIC MOTORCYCLE OIL

10W-30 • MCT

Superior synthetic formulation provides long service life, smooth shifts and maximum protection against engine wear in Honda,* Yamaha,* Suzuki* and Kawasaki* motorcycles.

5W-40 • MMF

Superior synthetic formulation provides long service life, smooth shifts and maximum protection against engine wear in BMW* R 1250 GS* and R 1300 GS,* Aprilia,* Benelli,* Can-Am,* Husqvarna,* Moto Guzzi* and other motorcycles specifying a 5W-40 viscosity.

10W-40 • MCF

Superior synthetic formulation provides long service life, smooth shifts and maximum protection against engine wear in Can-Am, Honda, Yamaha, Kawasaki, Triumph,* Suzuki, BMW and other motorcycle engines.

15W-50 • MFF

Superior synthetic formulation provides long service life, smooth shifts and maximum protection against engine wear in Ducati,* BMW, KTM,* Yamaha, Triumph and Royal Enfield* motorcycles.

Package sizes:



QUART



GALLON



Formula 4-Stroke® Synthetic Scooter Oil (ASO)¹³

Formulated specifically to meet the special needs of today's high-tech air- and water-cooled four-stroke motorized scooters.



QUART

¹³See page 50 for Proposition 65 information for this product.



Briggs & Stratton, the world's largest small-engine manufacturer, chose AMSOIL to formulate the motor oil it recommends to protect its most demanding racing engines. Imagine what AMSOIL can do for you.

ACCEPT NO SUBSTITUTES.



GBS2960



**Briggs & Stratton
Synthetic 4T Racing Oil (GBS2960)¹⁷**

Formulated by AMSOIL specifically for stock and modified small-displacement air-cooled racing engines and recommended for any four-stroke air-cooled competition engine.



QUART

¹⁷See page 50 for Proposition 65 information for this product.



- Outboard • Inboard
- Inboard/Outboard (I/O) • Watercraft

Synthetic Marine Engine Oil

Formulated specifically for use in four-stroke gasoline-fueled engines used in marine applications. Certified to meet NMMA FC-W Catalyst Compatible performance specifications.

10W-30¹³ • WCT

10W-40¹³ • WCF

25W-40 (Synthetic Blend)²³ • WCM

Package sizes:



QUART



GALLON



Pete Maina
Pro Fisherman



HP Marine™ Synthetic 2-Stroke Oil (HPM)¹³

Prevents piston skirt scuffing, cylinder bore scuffing and ring sticking in all two-stroke outboard motors, personal watercraft and anywhere NMMA TC-W3 and API-TC oils are specified.

Package sizes:



QUART



GALLON



RUNS ON FREEDOM

Don't let powersports manufacturers bully you into buying their brand of oil. You have the freedom to choose your brand of oil and keep your warranty intact. Find out more at AMSOIL.com/freedom.

²³ See page 50 for Proposition 65 information for this product.

ATO



Package sizes:



Outboard 100:1 Pre-Mix Synthetic 2-Stroke Oil (ATO)¹³

Contains a heavy dose of low-temperature dispersant additives that excel at reducing varnish and carbon deposit formation in water-cooled outboard motors.

Universal Synthetic Marine Gear Lube (AGM)¹⁸

Resists foam and retains extreme-pressure qualities in outboard lower units, stern drives, V-drives, bow and tunnel thrusters and marine transmissions. Delivers advanced outboard protection against power loss and gear wear, even with up to 15 percent water contamination.^V Choose the easy-pack for fast, easy installation.

OUTSTANDING PROTECTION FOR LOWER UNITS



Package sizes:



Marine Gear Lube Pump (G3456)²⁷

Specifically designed to ease installation and reduce mess when servicing lower units.

^{13, 18, 27}See page 50 for Proposition 65 information for this product.

^VBased upon AMSOIL testing of AMSOIL Synthetic Marine Gear Lube 75W-90 in ASTM 3233 and ASTM D892.



Runs On Freedom™ Limited Snowmobile Warranty

Use AMSOIL INTERCEPTOR® Synthetic 2-Stroke Oil exclusively in your current-model-year or newer sled and we'll cover engine repairs in the unlikely event of any engine breakdown for up to two years/5,000 miles.*

*To get details and register, visit AMSOIL.com/rofwarrenty.



Synthetic 2-Stroke Injector Oil (AIO)¹³

High-quality, cost-effective oil for the severe operating conditions of two-stroke snowmobiles and outboard motors.

Package sizes:



QUART



GALLON

MAXIMUM
RELIABILITY



INTERCEPTOR® Synthetic 2-Stroke Oil (AIT)¹³

Prevents piston skirt scuffing, ring sticking and exhaust power valve sticking in two-stroke snowmobiles.

Package sizes:



QUART



GALLON

Meets the performance requirements of Polaris*, Arctic Cat* and Ski-Doo* two-stroke snowmobiles.

¹³ See page 50 for Proposition 65 information for this product.

AMSOIL Fights Wear

AMSOIL INTERCEPTOR® Synthetic 2-Stroke Oil delivered **outstanding wear protection and cleanliness** in a rental sled throughout 1,617 miles of abuse.^{CC}

AMSOIL kept pistons virtually free of carbon with nearly all coating intact.



AMSOIL fought the formation of carbon deposits, allowing power valves to move freely.



^{CC}Based upon use of a new 2019 Polaris® RMK® 850 as a rental sled at Grizzly Lodge December 2018 - February 2019. *All trademarked names and images are the property of their respective owners and may be registered marks in some countries. No affiliation or endorsement claim, express or implied, is made by their use.



TDR

**MAXIMUM
PERFORMANCE**

Anson Scheele
Team AMSOIL
Scheuring Speed Sports



DOMINATOR® Synthetic 2-Stroke Racing Oil (TDR)¹³

Delivers outstanding wear protection in high-horsepower and modified racing or trail motors, including snowmobiles, motorcycles, ATVs, personal watercraft, go-carts and outboard motors.



Package sizes:



QUART



GALLON



TCC

Synthetic Chaincase & Gear Oil (TCC)

Superior protection for enclosed chains and gears found in snowmobiles, ATVs, UTVs and general equipment.

**16.0
OUNCE**

BOTTLE



ATP

SABER® Professional Synthetic 2-Stroke Oil (ATP)¹³

Provides superior protection for handheld two-stroke equipment at any mix ratio up to 100:1, offering the ultimate in convenience.

Package sizes:

**1.5
OUNCE**

PILLOW
PACK

**2.6
OUNCE**

BOTTLE

**3.5
OUNCE**

BOTTLE

**6.4
OUNCE**

BOTTLE

**8.0
OUNCE**

BOTTLE

**12.8
OUNCE**

BOTTLE



QUART



GALLON

SABER® Ratio™
100:1 ... 1.3 oz. 1 GAL

¹³See page 50 for Proposition 65 information for this product.

SABER Professional Fights Carbon

Equipment using SABER Professional was **96% carbon-free¹⁴**.



AMSOIL SABER Professional
300 Hours
3.8% Screen Blockage

VS.



Leading Oil Brand
45 Hours
98% Screen Blockage

¹⁴Based on spark-arrestor testing.

AES



ASE



ASF



SEF



AHF



Synthetic Small-Engine Oil

Helps preserve engine power, reduce oil consumption and reduce maintenance in small engines used in severe service.

Riding and Push Lawnmowers • Snowblowers • Generators • Pumps • Welders • Skid-Steers • Compressors • and more

Package sizes:



QUART



GALLON



20W-50 Zero-Turn Synthetic Hydrostatic Transmission Fluid (AHF)¹³

Fights wear to deliver smooth control and responsive power in zero-turn hydrostatic mowers.

Package sizes:



QUART



GALLON

¹³See page 50 for Proposition 65 information for this product.

Signature Series Synthetic Automatic Transmission Fluid

Resists wear and provides smooth shifts in passenger-car/light-truck transmissions. Provides reserve protection in fleet vehicles, work trucks and other severe-service applications that quickly break down other lubricants.

Handle More Heat With Confidence

Standard Severe Service

AMSOIL Severe Service

RESERVE PROTECTION

Change Interval – Miles

Ultra-Low-Viscosity • ULV

Multi-Vehicle³⁷ • ATF

Fuel-Efficient³⁷ • ATL

Engineered to exceed the requirements of original equipment manufacturers (OEMs) specifying low-viscosity oil.

Package sizes:



QUART



QUART



GALLON



GALLONS



³⁷See page 50 for Proposition 65 information for this product.

OTL

OE Synthetic Automatic Transmission Fluid

Resists wear and provides smooth shifts in passenger-car/light-truck transmissions.

Fuel-Efficient¹³ • OTL

Engineered to exceed the requirements of original equipment manufacturers (OEMs) specifying low-viscosity oil.

Multi-Vehicle¹³ • OTF

Package sizes:



QUART



GALLON



GALLONS



CVT

Synthetic CVT Fluid (CVT)¹³

Provides outstanding protection and performance for continuously variable transmissions (CVT) throughout original equipment manufacturer (OEM)-recommended drain intervals.

Package sizes:



QUART



GALLON



¹³See page 50 for Proposition 65 information for this product.

DCT



100% Synthetic DCT Fluid (DCT)

Designed to protect high-tech dual-clutch transmissions during the most intense, high-heat operating conditions.



QUART

MTG



Synthetic Manual Transmission and Transaxle Gear Lube (MTG)¹⁵

Provides improved internal component protection. Formulated with extreme-pressure additives and advanced frictional qualities that provide smooth shifts while protecting gears, bearings and seals. Non-corrosive to yellow metals.

Package sizes:



QUART



QUART

MTF



Synthetic Synchronesh Transmission Fluid (MTF)

Specifically designed to deliver smooth shifts and superior wear protection in manual transmissions and transaxles with synchronizers.



QUART

¹⁵See page 50 for Proposition 65 information for this product.

ART



Super Shift® Racing Transmission Fluid (ART)¹⁷

Formulated to prevent slippage and reduce heat in high-performance, high-horsepower vehicles.



QUART

ATD



Torque-Drive® Synthetic Heavy-Duty Automatic Transmission Fluid (ATD)³¹

Premium fluid designed for use in both on- and off-highway heavy-duty equipment.

Package sizes:



GALLON



GALLONS

ATH



Synthetic Tractor/Hydraulic Transmission Oil (ATH)³²

Formulated for combinations of transmissions, hydraulic systems, final drives, power take-off systems and wet brakes in heavy-duty farm and industrial equipment as well as commercial and residential lawn tractors.



QUART

^{17, 31, 32}See page 50 for Proposition 65 information for this product.



SVL

SEVERE GEAR® Synthetic EP Gear Lube

Specifically engineered for high-demand applications, including trailer towing, heavy hauling, 4x4 off-road driving, commercial use and racing.

75W-85 • SVL

Top fuel efficiency and cold-temperature performance

75W-90 • SVG

Outstanding fuel efficiency and cold-temperature performance

80W-90¹³ • AGL

Excellent extreme-pressure performance and wear protection

75W-110 • SVT

Extra viscosity protection without sacrificing fuel efficiency

75W-140 • SVO

Maximum viscosity protection for severe-duty applications



SVG

AGL

Package sizes:



QUART



QUART



SVT

SVO

Whoever invented the easy-pack concept is a genius. Especially for servicing transfer cases and differentials. It lives up to its name. Not only an innovative oil, but innovative packaging as well.

— Joey
Calif.

¹³See page 50 for Proposition 65 information for this product.

SRT



SEVERE GEAR® SAE 250 EP Synthetic Racing Gear Lube (SRT)²⁸

Engineered specifically for the demands of severe racing conditions, including off-road truck racing, rock racing, rock crawling, tractor pulling, funny car racing and dragster racing applications.



QUART

FGR



75W-90 Long Life Synthetic Gear Lube (FGR)¹³

Specifically engineered for extended drain intervals up to 500,000 miles as set by equipment manufacturers for over-the-road trucks and heavy equipment.

Package sizes:



QUART



GALLON

ADA



Slip Lock® Differential Additive (ADA)²¹

Designed to eliminate gear-housing chatter in cars, trucks and SUVs equipped with limited-slip differentials.

Note: AMSOIL synthetic gear lubes do not require the use of this additive. However, not all differentials respond the same and if chatter is noticed, the addition of AMSOIL Slip Lock will eliminate it.



TUBE

Easy Installation

Hand Pump (G2039)




G2039

^{28, 13, 21}See page 50 for Proposition 65 information for this product.

99% Efficiency at 20 Microns

Filtering particles >20 microns fights engine wear.^{AA}

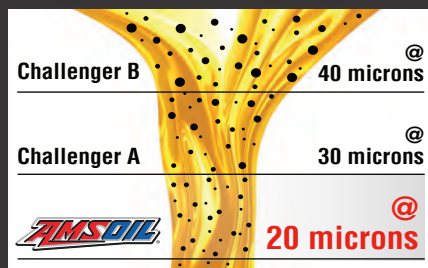

^{AA}In accordance with industry-standard ISO SO 4548-12.



Oil Filters (EAO/EA15K)

AMSOIL Oil Filters rank among the highest efficiency filters available to the auto/light-truck and powersports markets, providing a filtering efficiency of 99 percent at 20 microns. Featuring advanced full-synthetic technology, AMSOIL Oil Filters provide greater efficiency, capacity and durability than cellulose filters, extending engine and filter life and reducing engine wear.

- Oil Filters designated with product code EA15K are recommended for 15,000 miles/one year, whichever comes first, in normal or severe service. NOTE: Change oil filter at every oil change.
- Oil Filters designated with product code EAO are recommended for 25,000 miles/one year, whichever comes first, in normal service or 15,000 miles/one year, whichever comes first, in severe service. NOTE: Change oil filter at every oil change.

Which filter do I need?

Check the product guides at AMSOIL.com, call 1-800-777-7094 (Monday-Friday, 7 a.m. - 7 p.m. Central Time) or contact the AMSOIL Dealer listed on the back of your catalog (if one is listed) to determine the appropriate filter for each application. When AMSOIL Oil Filters are used with a motor oil other than AMSOIL motor oil the filter should be changed according to the vehicle manufacturer recommendation.

Fill in your vehicle information. Then call 1-800-777-7094 (Monday - Friday, 7 a.m. - 7 p.m. Central Time). You may also contact the AMSOIL Dealer listed on the back of your catalog (if one is listed) to determine your appropriate oil and air filters.

Make _____ Year _____ Model _____ Engine _____

VIN _____

Your Oil Filter is _____

Your Air Filter is _____



More Premium Filters

AMSOIL offers a variety of specialty oil filters constructed with premium synthetic technology. Check the Product Guides at AMSOIL.com or call (715) 399-8324 (TECH) (Monday-Friday, 8 a.m. - 5 p.m. Central Time) for application information.

EAHD



Heavy-Duty Extended-Life Oil Filters • EAHD

Provide excellent 99 percent filtering efficiency at 20 microns and high contaminant capacity for heavy-duty on- and off-road diesel and gasoline applications. Provide extended service intervals that coincide with the maximum drain intervals of AMSOIL synthetic engine oils.

BMK



Bypass Filtration

High-efficiency bypass filters effectively remove minute dirt particles and soot by working in conjunction with the engine's full-flow oil filter.

BYPASS OIL FILTRATION SYSTEMS • BMK

Single-Remote Bypass Kit (BMK21)
DUAL-GARD Bypass Kit (BMK22)
Universal Dual-Remote Bypass System (BMK23)
Ford 7.3L Dual-Remote Bypass System (BMK26)
2001-2019 GM 6.6L Dual-Remote Bypass System (BMK27)
Ford 6.7L Dual-Remote Bypass System (BMK28)
Heavy-Duty Bypass Kit (BMK30)
Ford 6.0/6.4L Single-Remote Bypass System (BMK31)
2001-2016 GM 6.6L Single-Remote Bypass System (BMK32)
Ford 6.7L Single-Remote Bypass System (BMK33)
2004-current Cummins 5.0L/5.9L/6.7L Single-Remote Bypass System (BMK34)

BYPASS OIL FILTERS • EABP

6" Filter (EABP90)
7.5" Filter (EABP100)
10.5" Filter (EABP110)
Heavy-Duty Filter for BMK30 (EABP120)

EAOM



Powersports Oil Filters (EAOM)

High-efficiency filters available for the motorcycle and powersports market. Provide excellent 99 percent filtering efficiency at 20 microns. Available in black or chrome (as available).

GRG



DOMINATOR® Synthetic Racing Grease (GRG)²¹

High-performance bearing and chassis lubrication for all race applications on snow, dirt, water and track. Designed for bearings that operate under high-speed, high-heat or low-temperature conditions.



CARTRIDGE

Synthetic Polymeric Off-Road Grease

Extreme-pressure, moly-fortified grease that provides outstanding protection for heavy-load-bearing applications, including steering knuckles, spring shackles, heavy equipment pivot joints and other components operating in high-load, low-speed conditions.

GPOR1



GPOR2



Synthetic Polymeric Off-Road Grease³⁶ • GPOR1

Use in applications that require NLGI No. 1, 5% Moly

Synthetic Polymeric Off-Road Grease³⁶ • GPOR2

Use in applications that require NLGI No. 2, 5% Moly



CARTRIDGE

Synthetic Polymeric Truck, Chassis and Equipment Grease

Delivers excellent wear protection and performance in severe-service, extreme-pressure environments such as axle assemblies, U-joints, pivot pins, fifth-wheel plates, steering linkages, kingpins, water pump bearings, ball joints and other greasable bearings and chassis components.

GPTR1



GPTR2



Synthetic Polymeric Truck, Chassis and Equipment Grease³⁵ • GPTR1

Use in applications that require NLGI No. 1

Synthetic Polymeric Truck, Chassis and Equipment Grease³⁵ • GPTR2

Use in applications that require NLGI No. 2



CARTRIDGE

^{21, 36, 35}See page 50 for Proposition 65 information for this product.

GLC



Synthetic Multi-Purpose Grease (GLC)¹⁷

Delivers premium wear protection for bearings, bushings, chassis lubrication and other applications.

Use in applications that require NLGI No. 2



CARTRIDGE

GWR



Synthetic Water-Resistant Grease (GWR)

Provides outstanding water-washout and spray-off resistance for applications frequently exposed to water, mud, snow or ice.

Use in applications that require NLGI No. 2



CARTRIDGE

GXC



X-Treme Synthetic Food Grade Grease (GXC)

Designed for high levels of protection in food and pharmaceutical industry equipment. NSF-approved formula (formerly USDA H-1) for incidental contact with food.

Use in applications that require NLGI No. 2



CARTRIDGE

¹⁷See page 50 for Proposition 65 information for this product.

GSP



Spray Grease (GSP)

Applies quickly and evenly and is ideal for greasing hard-to-reach equipment, including hinges, springs, industrial chains, latches, slides, winches and other common applications.

10.0
OUNCE

SPRAY CAN

AIR



Synthetic Air Tool Oil (AIR)¹³

Effectively lubricates rotary and piston-type air-tool bearings and motors, while managing moisture and conditioning rubber and plastic seals and O-rings.

4.0
OUNCE

BOTTLE

ABC



Semi-Synthetic Bar and Chain Oil (ABC)¹⁷

Delivers excellent lubrication and protection, helping extend the life of bar and chain applications.

Package sizes:



QUART



GALLON

^{13, 17}See page 50 for Proposition 65 information for this product.

PCI



Synthetic Compressor Oil

Superior protection for rotary screw, rotary vane, reciprocating and other compressor applications.

ISO 46, SAE 20¹³ • PCI

ISO 100, SAE 30/40 • PCK



Gasoline Stabilizer (AST)¹³

Helps prevent the formation of varnish and sludge in stored seasonal equipment such as snowmobiles, lawnmowers, motorcycles and boats. One ounce treats 2.5 gallons of fuel.



AMSOIL Fights Corrosion

AMSOIL provides corrosion protection Sea Foam[®] Motor Treatment can't match, helping maintain power and performance and keeping metal corrosion free, even when subjected to salt water.*

AMSOIL

Sea Foam



**Based on independent third-party testing of AMSOIL Gasoline Stabilizer obtained July 1, 2022, and Sea Foam Motor Treatment purchased June 30, 2022, in a modified NACE TM0172 using synthetic sea water per ASTM D665B.*


¹³See page 50 for Proposition 65 information for this product.

UCL



Upper Cylinder Lubricant Gasoline Additive (UCL)¹³

Lubricates fuel system and upper cylinders. Fights ethanol-related corrosion. Helps keep injectors clean. Bottle compatible with capless fuel systems. Use entire bottle at every fill-up.

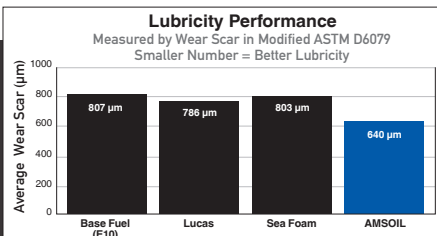

Preserves Horsepower and Performance

AMSOIL delivers 18 percent more lubricity than Lucas* and 20 percent more than Sea Foam* for better retention of horsepower and fuel economy.¹³

¹³Based on independent testing of AMSOIL Upper Cylinder Lubricant, Lucas Upper Cylinder Lubricant and Sea Foam Motor Treatment obtained on 02/13/2019 using the ASTM D6079 modified for use with gasoline. *All trademarked names and images are the property of their respective owners and may be registered marks in some countries. No affiliation or endorsement claim, express or implied, is made by their use.

INDUSTRY'S MOST
ADVANCED
FORMULATION



API


P.i.® (API)¹³

Restores up to 14 percent horsepower.^{NN} Bottle compatible with capless fuel systems. Add entire bottle to tank at fill-up.


**12.0
OUNCE**
BOTTLE

AMSOIL Restores Horsepower

AMSOIL P.i.® restores up to 14% horsepower.^{NN}

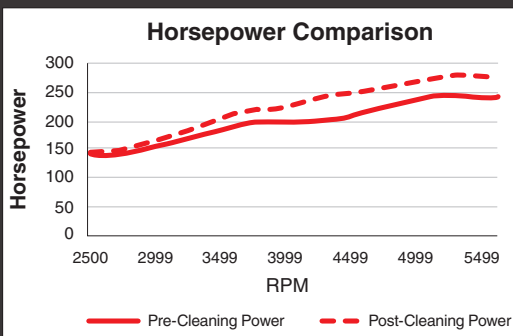

^{NN}Based on third-party testing in a 2016 Chevrolet® Silverado® 1500, 5.3L V-8 GDI with 100,616 miles, using one tank treated with AMSOIL P.i. Actual results may vary. *All trademarked names and images are the property of their respective owners and may be registered marks in some countries. No affiliation or endorsement claim, express or implied, is made by their use.



**Injector before
P.i. treatment.**



**Injector after one
P.i. treatment.**



**Cylinder head
before P.i.
treatment.**



**Cylinder head
after one P.i.
treatment.**

¹³See page 50 for Proposition 65 information for this product.



Addresses Ethanol-Related Performance issues


DIRECTIONS: One bottle treats up to 6 gallons for cleanup and up to 12 gallons for continued protection. For best results use with every tank.

Quickshot® (AQS)

Effectively addresses performance issues related to ethanol, water and dirty pump gas in two- and four-stroke gasoline-powered engines and powersports equipment fuel systems, restoring peak performance.

Motorcycles • Snowmobiles • Boats • ATVs • Edgers • Tillers • Mowers • Snowblowers • Chainsaws • Generators • Farm & Construction Equipment • and more

Package sizes:

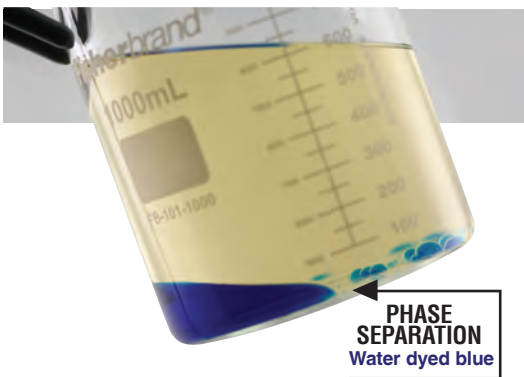

Phase separation is when ethanol/water mixtures fall to the bottom of fuel tanks and containers, leading to lean-burn conditions.

Quickshot helps keep water molecules dispersed to prevent phase separation.

Degraded fuel can present a major maintenance issue in motorcycle engines, forming varnish, gum and insoluble debris that clog carburetors, fuel injectors and fuel filters. Carbon buildup can form on the tops of pistons resulting in pre-ignition, rough idling and poor throttle response. Fuel-related problems are only expected to intensify in the coming years as the ethanol content in pump gasoline continues to increase.

AMSOIL Quickshot® (AQS) is a premium fuel additive formulated to thoroughly clean and restore peak performance in motorcycle and powersports equipment fuel systems. It also stabilizes fuel between uses and during short-term storage periods.



MOB



AOB

DOMINATOR® Octane Boost (AOB)²¹

Improves the performance of all two- and four-stroke gasoline-fueled engines. Treats up to 15 gallons of gasoline.

12.0
OUNCE
BOTTLE

Motorcycle Octane Boost (MOB)²¹

Increases octane up to three numbers for maximum power and efficiency in motorcycles. Treats 4-6 gallons of gasoline.

4.0
OUNCE
BOTTLE



DRC



ADD

Diesel Recovery (DRC)²⁸

Emergency diesel fuel treatment that liquefies gelled diesel fuel and thaws frozen fuel filters. Keep a bottle on hand for emergencies. One ounce treats up to 1 gallon of fuel.

30.0
OUNCE
BOTTLE

Diesel Cold Flow (ADD)²⁸

Effectively modifies wax crystal formation at low temperatures to depress diesel fuel pour point, prevent wax settling and improve cold-flow filtration properties. Lowers cold filter-plugging point (CFPP) by up to 40°F (22°C) in ultra-low-sulfur diesel (ULSD). One ounce treats up to 5 gallons of fuel.

16.0
OUNCE
BOTTLE



ACB

Diesel Cetane Boost (ACB)

Raises the cetane number of diesel fuel up to eight points for maximum horsepower, increased fuel economy and easier starts in all diesel engines. Diesel engines operate best on fuel with cetane values of 50 or higher. Most diesel fuel sold in North America has a cetane value of 40-45. One ounce treats up to 10 gallons of fuel.

Package sizes:

16.0
OUNCE
BOTTLE

64.0
OUNCE
BOTTLE

^{21, 28}See page 50 for Proposition 65 information for this product.

ADB



Diesel 4-IN-1 (ADB)³⁸

Combines the superior deposit-removing properties of Diesel Injector Clean, the excellent anti-gelling properties of Diesel Cold Flow and the cetane-boosting benefits of Diesel Cetane Boost in one convenient package. One ounce treats up to 2.5 gallons of fuel.

Package sizes:



ADS



Diesel Injector Clean + Cetane Boost (ADS)²¹

Combines the superior deposit-removing properties of Diesel Injector Clean with the cetane-boosting benefits of Diesel Cetane Boost in one convenient package. One ounce treats up to 5 gallons of fuel.

Package sizes:



ADF



Diesel Injector Clean (ADF)¹⁹

Targets traditional nozzle deposits, combustion chamber deposits and internal diesel injector deposits found in HPCR injectors. Lubricates to reduce fuel pump and injector wear. Concentrated for rapid results, maximum horsepower and up to 8 percent increased fuel economy in engines with accumulated deposits. One ounce treats up to 5 gallons of fuel.

Package sizes:



UP TO 8%
FUEL ECONOMY IMPROVEMENT

^{38, 21, 19}See page 50 for Proposition 65 information for this product.



ACL



AFO

14.0
OUNCE

SPRAY CAN

Air Filter Oil (AFO)

Quickly penetrates foam air filters to help prevent dirt and water contamination and provide maximum clean airflow to the engine. Tacky formula provides superior adhesion that prevents fluid pooling in the airbox and traps dirt, sand and grit.

Chain Lube (ACL)

Provides outstanding protection against wear and corrosion. Helps extend chain life. Does not attract dirt and does not fling off. Fast-drying.

Package sizes:

4.5
OUNCE

SPRAY CAN

11.0
OUNCE

SPRAY CAN



APF



FOG

12.0
OUNCE

SPRAY CAN

Engine Fogging Oil (FOG)¹³

Helps prevent corrosion and dry starts to internal engine components found in outboard motors, lawn and garden equipment, motorcycles, snowmobiles, ATVs, motor homes and generators during storage or long periods of inactivity.

Power Foam® (APF)²¹

Improves starting and performance by cleaning dirty intake systems and spark plugs, freeing sticky valves and removing gum, varnish and carbon deposits.

18.0
OUNCE

SPRAY CAN



ADG

15.0
OUNCE

SPRAY CAN

Heavy-Duty Degreaser (ADG)

Formulated with powerful and fast-acting solvents, attacking petroleum-based grime on a molecular level to loosen its hold on metal, concrete and other surfaces.

^{13, 21}See page 50 for Proposition 65 information for this product.

ALS



Silicone Spray (ALS)¹³

Perfect for lubricating or protecting rubber, nylon, plastics, upholstery, vinyl, wood, cardboard or fiberglass. Also excellent for waterproofing leather products. Hundreds of household uses.

10.0
OUNCE
SPRAY CAN

AMS



Mudslinger® (AMS)

Provides a protective layer of armor against the accumulation of mud, dirt and snow on ATVs, UTVs and dirt bikes, easing clean-up.

12.0
OUNCE
BOTTLE

BEFORE Mudslinger®



AFTER Mudslinger®



Mudslinger makes an old machine look new again.

AED



Engine Degreaser (AED)

Effectively cleans engine surfaces by cutting through grease, oil and grime, making engines look new again.

15.0
OUNCE
SPRAY CAN

AGC



Glass Cleaner (AGC)

Cuts through grease and grime faster than other leading glass cleaners, stays where you spray it and leaves no streaks.

19.0
OUNCE
SPRAY CAN

¹³See page 50 for Proposition 65 information for this product.

FLPSC



FLPBA



Synthetic Firearm Lubricant and Protectant (FLP)

Effectively lubricates and protects firearms, helping extend life and prevent blockage, jams and wear. Outstanding protection and performance in both hot and cold climates. Specifically formulated for firearms, offering superior performance over multi-purpose products.


Package sizes:



FCPCN



FCPSC



Firearm Cleaner and Protectant (FCP)

Penetrates deep into hard-to-reach components, effectively cleaning fouling and powder residue from all firearm surfaces, safely protecting them for storage, reducing jamming and increasing reliability. Protects against corrosion, allowing for safe storage and preserving performance, reliability and value.

Package sizes:



"It's a great product to keep your firearms/shotguns in great working order & protect from our harsh weather elements."

— Steve
Pratts Fork, Ohio

AMP



AMH



Metal Protector (AMP)

Displaces water, penetrates and protects metal surfaces from corrosion, including hinges, squeaky mechanical objects, electrical systems and more.

Package sizes:



Heavy-Duty Metal Protector (AMH)¹³

Penetrates and adheres to metal surfaces, leaving a long-lasting coating that protects against the damaging effects of salt, moisture or chemical corrosion.



¹³See page 50 for Proposition 65 information for this product.

FLSH



PSF



Engine and Transmission Flush (FLSH)

Helps restore operating efficiency, increase fuel economy and reduce emissions in gasoline and diesel engines and automatic transmissions.

16.0
OUNCE
BOTTLE

Multi-Vehicle Synthetic Power Steering Fluid (PSF)¹³

Provides excellent wear protection, long component life and quiet operation in most passenger cars and light trucks.

16.0
OUNCE
BOTTLE



RDCB



Fluid Extraction Pump (G2576)

Aids in the removal of power steering fluid, motor oil, drivetrain lubricants and engine coolant. Can also be used to install fresh lubricants in hard-to-reach areas.

DOMINATOR® Coolant Boost (RDCB)

Helps reduce engine temperatures, increase horsepower, promote faster engine warm-up times and reduce radiator and engine corrosion in racing and passenger vehicles.

16.0
OUNCE
BOTTLE

PSAF



Powersports Antifreeze & Coolant (PSAF)¹⁵

Advanced design helps control operating temperature in hot-running, high-revving powersports applications. Extended-life formula provides all-season protection for up to five years.

QUART

^{15, 13}See page 50 for Proposition 65 information for this product.



Propylene Glycol Antifreeze & Coolant (ANT)

All-climate protection for up to 150,000 miles or 5 years, whichever comes first, in passenger cars and light trucks. Protection up to 1,000,000 miles, 20,000 hours or 8 years, whichever comes first, in heavy-duty applications. Concentrated formula.



GALLON

Passenger Car/Light Truck Antifreeze & Coolant (ANTPC)²⁹

Engineered to exceed original equipment manufacturer (OEM) requirements for up to 150,000 miles or 5 years, whichever comes first, in passenger cars and light trucks. Pre-mixed formula.



GALLON



AMSOIL Resists Corrosion

In third-party, industry-standard testing, cast-iron and copper plates protected by AMSOIL showed virtually **no signs of corrosion**.^{HH}

^{HH}Based on results of the ASTM D2570 corrosion test.



AMSOIL Resists Cavitation

In third-party, industry-standard testing, cylinder liners protected by AMSOIL showed virtually **no signs of cavitation**.^{II}

^{II}Based on results of the ASTM D7583 cavitation test.



ANTHD



Heavy-Duty Antifreeze & Coolant (ANTHD)²⁹

Provides superior heat transfer and excellent protection against corrosion, cylinder-liner cavitation, freezing and boilover. Protection up to 1,000,000 miles, 20,000 hours or 8 years, whichever comes first. Pre-mixed formula.



GALLON

Antifreeze Test Strips (G1164)

To test freeze protection and additive concentration, order antifreeze test strips:

²⁹See page 50 for Proposition 65 information for this product.



High-Foam Car Shampoo (HFB)

Powerful pH-neutral formulation delivers exceptional cleaning action without harming coatings and finishes.

16.0
OUNCE
BOTTLE

Ceramic Spray (CSF)

Advanced SiO2 ceramic technology enhances gloss and protects painted and plastic surfaces for up to 12 months with a simple spray-on, wipe-off application.

16.0
OUNCE
BOTTLE



Interior Detailer

Cleans plastic, trim, dashes and displays without streaks or greasy residue.

Interior Detailer - Lemon • IDL



Interior Detailer - Unscented • IDN

16.0
OUNCE
BOTTLE

Quick Detailer (QDS)

A specially blended formula of surfactants lifts light dust and debris from painted and plastic surfaces with a quick spray-on, wipe-off application for easy detailing between washes.

16.0
OUNCE
BOTTLE



Wheel + Tire Cleaner (WTC)

pH-balanced 2-in-1 formula removes brake dust, road grime and tire blooming without harming wheels or tires.

16.0
OUNCE
BOTTLE

TTPCN



Tire + Trim Protectant (TTP)

Advanced, non-greasy formula conditions rubber and exterior plastic trim for a long-lasting satin or gloss finish, with quick-drying, low-sling properties and UV protection.

16.0
OUNCE

BOTTLE

Accessories

Foam Cannon (G3911)
Detailing Towel 2-Pack (G3912)
Drying Towel (G3913)
Microfiber Wash Mitt (G3914)

BFLV



DOT 3 & 4 Synthetic Brake Fluid (BFLV)³³

High-performance brake fluid specially designed as a multi-use product for passenger-car, light-truck and powersports applications.

12.0
OUNCE

BOTTLE

BPC



BFR



DOMINATOR DOT 4 Synthetic Racing Brake Fluid (BFR)¹⁰

High boiling point brake fluid engineered to resist brake fade and vapor lock during intense racing applications.

12.0
OUNCE

BOTTLE

Brake and Parts Cleaner (BPC)³²

Professional-strength parts cleaner that quickly removes oil, grease, brake fluid and other contaminants from brake parts and other automotive components.

19.0
OUNCE

SPRAY CAN

^{33, 10, 32}See page 50 for Proposition 65 information for this product.



Non-Chlorinated Brake & Parts Cleaner (NCBC)

Removes oil, grease, brake fluid and other contaminants from brake parts and other automotive components. Cleans brake parts with no major disassembly and leaves no residue, helping reduce brake squeal and chatter.

14.0
OUNCE
SPRAY CAN

Miracle Wash® Waterless Wash & Wax (AMW)

Unique dry car wash and polish delivers outstanding performance and quick, easy and economical application. No water required.

13.0
OUNCE
SPRAY CAN

Aftermarket Partners

AMSOIL also offers premium filtration products from its aftermarket partners, including Donaldson, WIX and MANN FILTER.

For product and pricing information, call 1-800-777-7094 (Monday - Friday, 7 a.m. - 7 p.m. Central Time) or contact the AMSOIL Dealer listed on the back of your catalog (if one is listed).



The Company of FIRSTS

More than 45 Years of Innovation and Leadership

- FIRST** API-qualified 100 percent synthetic motor oil.
- FIRST** to introduce the concept of "extended drain intervals" with a recommended 25,000-mile/12-month drain interval.
- FIRST** synthetic gear lube for automotive use.
- FIRST** synthetic motor oil for diesel engines.
- FIRST** synthetic motor oil for racing engines.
- FIRST** synthetic motor oil for turbocharged engines.
- FIRST** synthetic motor oil for marine engines.
- FIRST** 100:1 pre-mix synthetic 2-cycle oil.
- FIRST** synthetic automatic transmission fluid for automotive use.



CALIFORNIA PROPOSITION 65

⚠️ WARNING STATEMENTS ⚠️

- 10 ⚠️ WARNING:** This product can expose you to 2,2'-Iminodiethanol, which is known to the State of California to cause cancer, and Ethanediol, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.
- 13 ⚠️ WARNING:** This product can expose you to Benzene, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.
- 15 ⚠️ WARNING:** This product can expose you to Ethanediol, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.
- 17 ⚠️ WARNING:** This product can expose you to Ethylbenzene, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.
- 18 ⚠️ WARNING:** This product can expose you to Ethylene oxide, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.
- 19 ⚠️ WARNING:** This product can expose you to Naphthalene, which is known to the State of California to cause cancer, and Methanol which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.
- 21 ⚠️ WARNING:** This product can expose you to Naphthalene, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.
- 23 ⚠️ WARNING:** This product can expose you to Toluene, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.
- 27 ⚠️ WARNING:** This product can expose you to Di(2-ethylhexyl)phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.
- 28 ⚠️ WARNING:** This product can expose you to Ethylbenzene, which is known to the State of California to cause cancer, and Toluene, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.
- 29 ⚠️ WARNING:** This product can expose you to Ethylene Glycol, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.
- 31 ⚠️ WARNING:** This product can expose you to Benzene and Lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.
- 32 ⚠️ WARNING:** This product can expose you to Tetrachloroethylene, which is known to the State of California to cause Cancer. For more information go to www.P65Warnings.ca.gov.
- 33 ⚠️ WARNING:** This product can expose you to Diethanolamine, which is known to the State of California to cause cancer, and 2-Methoxyethanol, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.
- 35 ⚠️ WARNING:** This product can expose you to chemicals including Crystalline Quartz Silica, Naphthalene and Ethylbenzene, which are known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.
- 36 ⚠️ WARNING:** This product can expose you to chemicals including Crystalline Quartz Silica and Naphthalene, which are known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.
- 37 ⚠️ WARNING:** This product can expose you to chemicals such as Lead, which is known to the State of California to cause cancer, birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.
- 38 ⚠️ WARNING:** This product can expose you to chemicals such as naphthalene, which is known to the State of California to cause cancer, and chemicals such as toluene, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.



PROTECTION | PERFORMANCE
you demand. | you deserve.™

AMSOIL INC.
1 AMSOIL Center
Superior, WI 54880

WE HONOR



(Discover in U.S. only)

Your Servicing **AMSOIL Dealer**

Refer to this referral number to save time and make ordering easier. Call toll-free at 1-800-777-7094. Credit card orders only. ▼

323230

Referral # _____